

































80
YEARS
STRONG

2018 CATALOGUE

ELECTRIC FENCING





 Horses	 Game	 Fish	 12 Volt	 10-year warranty	 EconomyLine
 Cattle	 Chickens	 Birds	 2-year warranty	 Without metal core	 PowerLine
 Sheep	 Rabbits	 6 Volt	 3-year warranty	 With metal core	 0 to 500 metres
 Wild boar	 Dogs	 7.5 Volt	 5-year warranty	 UV-resistant	 TurboLine
 Goats	 Cats	 9 Volt	 7-year warranty	 Stainless steel	 Longer than 500 metres








































 Permanent fence	 Adjustable voltage	 Chargeable battery	 External display	 6V battery supply
 Portable fencing	 Battery life check	 Alarm compatible	 Includes remote control	 9V battery supply
 LCD display	 Battery-saving options	 SMS compatible	 Includes fencing monitor	 12V battery supply
 Output voltage diagram	 Energy-saving option	 Solar-power supply / solar-power compatible	 230V compatible	 Includes 6V/12V battery

TABLE OF CONTENTS

80 years of Gallagher	4	
New products and special offers	6	
Energizers	10	
Fencing solutions	28	
Batteries	30	
Earthing	33	
Security measures and testers	34	
Posts	37	
Conductors	44	
Insulators	52	
Connectors	58	
Gates	60	
Reels and tools	64	
Netting	67	
Kits	72	
Other products	74	
Install and check	75	
Weighing and EID systems	76	
Index	78	



Bill Gallagher senior



The Gallagher Story: Joe the Horse
(by Sir William, the son of the founder and the current owner of Gallagher)

GALLAGHER 80 YEARS

JOE, THE GALLAGHER FAMILY'S HORSE. THE STORY OF THE EARLY DAYS STARTED WITH HIM. HE USED THE FAMILY CAR AS A SCRATCHING POST AND THAT WAS NOT QUITE THE IDEA. BILL GALLAGHER SENIOR DEVELOPED A SOLUTION FOR THE PROBLEM AND THE VERY FIRST ENERGIZER IN THE WORLD WAS BORN. ADD THE GALLAGHER PHILOSOPHY AND YOU HAVE THE REASON FOR THE SUBSEQUENT SUCCESSES.

Client first

Joe's story symbolises the mission that is inherent to Gallagher: To develop the best products to help you - anywhere in the world - to solve your problems and improve business operations. That is the underlying principle of everything we do.

Innovation

To be the best. We are and we do everything in our power to stay the best. We are constantly looking for opportunities to strengthen our lead. We achieve that by continuously improving ourselves and our products. Always driven by input from our customers.

Top quality

Whether it is about customised service or innovative products that meet your needs - our priority is always the best quality and the best service.

And what about the next 80 years?

The Gallagher philosophy is solid as a rock. It was back in the day, it is now, and it will be in the future. It's in our genes, it's who we are. For the future you can expect what you could always expect from us - we are ready to serve with the best products and service for you!

'BRILLIANT SIMPLICITY'

80 YEARS OF GALLAGHER IN IMAGES

FIRST ENERGIZER IN THE WORLD

Bill Gallagher makes the very first energizer to make sure his horse Joe no longer scratches his car...



1938

PRODUCTION START-UP OF ELECTRIC FENCING

Production starts from a workshop in Hamilton, New Zealand.



1949

1969

FIRST MAINS ENERGIZER

It becomes possible to put more current on fencing.



1970

1978

START OF SALES IN EUROPE

Farmers in Europe are flabbergasted by the power of Gallagher energizers.



1982

INTRODUCTION OF SMARTPOWER - FIRST INTELLIGENT ENERGIZER IN THE WORLD

Gallagher develops energizers that produce more current when more current is required because of a short-circuit for example.



1998

RANGE OF ENERGIZERS COMPLETE - MAINS, BATTERY AND SOLAR

To ensure the best possible solution for our customers, Gallagher markets a complete range of energizers with a comprehensive range of fencing accessories.



1999

INTRODUCTION OF UNIQUE RING INSULATOR XDI

The first and only ring insulator that tells you when the insulator needs to be replaced.



2004

INTRODUCTION OF SMARTFENCE

Following ideas from European farmers, Gallagher refines the concept of portable fencing by launching this all-in-one solution.



2010

INTRODUCTION OF THE i SERIES

The i Series is designed to monitor the performance of the trusted, powerful Gallagher energizers quickly and easily.



2012

2014

INTRODUCTION OF RING POST

Based on farmers' ideas. The post prevents hooking into other posts.



2016

INTRODUCTION OF THE INSULATED LINE POST

Innovative and cost-efficient solution for permanent electric fencing.



2017

INTRODUCING THE MOST POWERFUL SOLAR ENERGIZER IN THE WORLD

The first integrated solar energizer for large fencing of up to 30 km in off-grid areas.



2018

80 YEARS OF GALLAGHER

The undisputed best for 80 years. Onwards to the next 80!

80
YEARS
STRONG



NEW PRODUCTS & SPECIAL OFFERS

**ESPECIALLY
FOR YOU**

NEW! THE SPECIAL EDITION RANGE

**SPECIAL
EDITION**

HIGH POWER ⚡ LOW PRICE

M550

An LED light shows whether the energizer is providing current. Enough power for fencing up to 25 km.

M950

LED lights show the energizer's performance. Easy to install with the split connection button. Provides power for fencing up to 30 km.

M1400

LED lights show the energizer's performance. Easy to install with the split connection button. Enough power for fencing up to 38 km.



323312	M550	☎=1
324302	M950	☎=1
324319	M1400	☎=1



NEW!

THE INSULATED LINE POST

FROM POST TO EFFICIENT FENCING SOLUTION!

The Insulated Line Post with clips is the new solution for permanent fencing. Ideal for leased pasture or difficult to reach pasture. This perfectly insulated post can be positioned and removed by hand without any difficulties. It is just as firmly in the ground as a permanent wooden post, because of the solid foot plate. Due to the fibreglass core and the HDPE coating, it is extremely flexible and gives a little when an animal or something else contacts the fencing. The post really is a complete solution with the corresponding clips that are suitable for all types of Gallagher conductors.

UNIQUE
IN THE
MARKET



742212	Gallagher Insulated Line Post 1,35m	☞ = 4
742014	Gallagher Insulated Line Post 0,95m	☞ = 4
747033	TurboLine Tape clip for Line Post (40mm)	☞ = 12
744346	Wire clip for Line Post (8mm)	☞ = 20



M2800i + REMOTE CONTROL

Extremely powerful energizer with 21 Joule of stored energy, suitable for fencing of up to 53km.

**FREE REMOTE CONTROL
TO SWITCH THE ENERGIZER ON/OFF
ALL ALONG THE FENCING.**



306315 M2800i

☞ = 1

B35 + FREE BATTERY

Powerful and reliable with a built-in alarm that indicates when the battery is nearly empty, extremely easy to use, easy to move, with carry handle, 0.35 Joule, for fencing of up to 1,5 KM.

NOW WITH A FREE 55 AH BATTERY



356433 B35

☞ = 1

UNIQUE AND NEVER SEEN BEFORE!

THE S400 WORKS

UP TO 30KM!

'ULTIMATE RELIABILITY, PORTABLE AND STRONG!'

S200

360300

For fences of up to 20km.

The solarpanel with individual compartments continues to operate, even when daylight is not captured by the entire panel.

Stored energy: 2 Joules



S400

361307


With the larger solar panel it is even more powerful than the S200.

For fences of up to 30km.

Stored energy: 4 Joules



360300 S200 incl. 2 batteries (12V - 2,0 J)  = 1

361307 S400 incl. 2 batteries (12V - 4,0 J)  = 1



WHICH GALLAGHER ENERGIZER DO YOU NEED?

If you need to electrify fencing, Gallagher is the place for you! Will you opt for one of our intelligent energizers from the i Series? A battery solution? Maybe a solar energizer is better suited to your situation. Whatever your needs, we can offer the most reliable solution.



MULTI POWER

The Gallagher Multi Power energizers can be used in every possible way. Would you like to use solar panels, mains or a battery? No problem with these energizers!

MAINS ENERGIZERS

Our mains energizers are ideal for permanent fencing. These energizers do not need a battery and work on 230V.

There are different types of mains energizers for different types of fencing. Gallagher has the most suitable energizer for every type of fencing.



BATTERY ENERGIZERS

There may be fencing that cannot be connected to the mains and a battery energizer is a better choice in those situations. These energizers only need a battery and no mains. A number of energizers have a battery-saving option to lengthen the lifespan of the battery significantly.

SOLAR DEVICES

An energizer that works on solar power is the best choice for remote areas! The battery is charged by sunlight and converts it into electricity. The energizers will continue to run for 3 weeks without any sunlight, do not require maintenance, are environmentally friendly and reliable.


With the new Gallagher Solar range it is even possible to run fencing of up to 30 km on solar power! Absolutely unique in the market! Gallagher through and through!





MULTI POWER

Switches between
12V-230V / solar energy

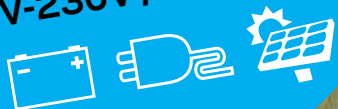

MULTI POWER

When it comes to flexibility, the Multi-Power energizers are the ideal choice for electric fencing. You can either just use the battery or to combine it with a solar panel to charge the battery. MultiPower energizers can also be connected to the mains by means of the optional mains adapter 12 V/230 V.

NEW POWERHOUSES MB2800i & MB1800i

ULTIMATE STRONG
BATTERY ENERGIZER
—
UP TO 53 KM

MB2800i Multi Power



The most powerful and most intelligent battery energizer in the market - that is the MB2800i. This strong energizer provides enough power for fencing of up to 53 km. This energizer can be used with a battery and a solar panel or it can be connected to the mains. It is versatile, with absolute control over your fencing! The external displays makes it easy to read the performance of your energizer, and together with the optional accessories you can expand this control even further.



NEW

POWER ⚡

THE
POWER
OF THE
i SERIES

SERVICE 🔧

CONTROL ✓



MB1800i Multi Power



The flexibility of a Multi-power energizer, combined with the power and intelligence of the i Series. This intelligent energizer can be used with a battery or it can be connected to the mains. The energizer is suitable for fencing of up to 43 km and provides insight into the fencing's performance with the supplied external display. There are many accessories that can be used to expand your energizer and to have absolute control over your fencing.



315317 MB1800i (230V AC / 12V DC - 14 J) ☼ = 1

MB1000 Multi Power



The MB1000 is our Multi Power energizer for fences of up to 30 km. This energizer is a strong time-delayed battery energizer with a battery. The MB1000 will integrate well with a solar solution. An optional 230V/15V grid adapter is available to power the product from mains supply if required. (item no 401324)



301303 MB1000 (230V AC / 12V DC - 10 J) ☼ = 1

401324 PowerSupply 230V/15V ☼ = 1

B280 Multi Power



Powerful Multi Power 12V battery energizer for fencing up to 20 km. Suitable for all kinds of animals. With integrated battery-saving options. Easy to operate by turning a switch. 5 settings: OFF - battery monitor - full power - random - night mode. LEDs for monitoring battery and output voltage: green is OK. Includes handle for carrying and mounting. Solar power option. Mains Power Supply adapter (partnr.053865) separately available.



028467 B280 Multi Power ☼ = 1

B280 + Solarbox






Specially designed to make the B280 portable. This packages deal includes the B280 and an easy to carry energizer box with solar bracket. Optional solar panels can be easily mounted to this powerfull combination. The B280 is a Multi Power 12V battery energizer for fencing up to 20 km.



073542 B280 + Solarbox ☼ = 1


IMPORTANT! Before you connect the mains adapter to your MultiPower energizer, you need to disconnect the battery first! Never connect to the mains when the battery is also connected!

ADAPTER TYPE 1




Connect the cable as shown

ADAPTER TYPE 2



Cable set



230V adapter



Connection



B180 Multi Power



Powerful Multi Power 12V battery energizer for fencing up to 13 km. Suitable for all kinds of animals. With integral battery-saving options. Easy to operate by turning a switch. 5 settings: OFF - battery monitor - full power - random - night mode. LEDs for monitoring battery and output voltage: green is OK. Includes handle for carrying and mounting. Solar power option. Mains Power Supply adapter (partnr.053865) separately available.



028450 B180 Multi Power ⚡ = 1

B180 + Solarbox



Specially designed to make the B180 portable. This packages deal includes the B180 and an easy to carry energizer box with solar bracket. Optional solar panels can be easily mounted to this powerfull combination. The B180 is a Multi Power 12V battery energizer for fencing up to 13 km.



073535 B180 + Solarbox ⚡ = 1

B80 Multi Power



Powerful Multi Power 12V battery energizer for fencing up to 7 km. Suitable for all kinds of animals. Easy to operate by turning a switch. 3 settings: off, full power and battery charge level check. LEDs for monitoring battery and output voltage: green is OK. Includes handle for carrying and mounting. Solar power option. Mains Power Supply adapter (partnr.053865) separately available.



028443 B80 Multi Power ⚡ = 1

053865 Power Supply 230V/12V ⚡ = 1

SPECIFICATIONS MULTI POWER

	Maxi- mum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maxi- mum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recom- mended battery (minimum)	Power con- sumption at 12V(mA)	Power con- sumption in saving mode (mA)	Suitable for solar panel (minimum)	Main features	Supply internal/ external
MB2800i 315331	7000	6400	5400	21	14	53	20	11	120	2x Optima YT S5,5L	730	-	360W		
MB1800i 315317	7000	7000	5200	14	10	43	17	9	75	3x Optima YT S5,5L	550	-	240W		
MB1000 301303	8000	8000	3800	10	7	30	15	7	40	Optima YT R3,7L	510	-	180W		
B280 028467	8000	4500	1500	2,8	1,5	20	8	4	15	Optima YT R3,7L	240	98	30W		
B180 028450	7900	4400	1500	1,8	1,1	13	5	3	10	Optima YT S2,7L	170	70	20W		
B80 028443	7500	3800	1200	0,8	0,6	7	3	1	4	Optima YT S2,7L	80	-	10W		

i SERIES - 230V

Powerful, intelligent and technically perfect energizers.

With their power, intelligence and technical perfection, the energizers in the i Series are the best in the world! Furthermore, you always receive the best possible service and installation advice from a Gallagher specialist.



ULTIMATE POWER

- Adaptive Control® provides a continuous voltage on the fencing, any time anywhere, with the lowest possible electricity consumption
- Burns away vegetation
- Maximum power, even at the end of the fencing

ABSOLUTE CONTROL

- Extremely practical and easy to operate
- Be warned immediately and anywhere
- Always aware of the state of the fencing with the Energizer Controller®



OPTIMUM SERVICE

- Product and installation advice from the Gallagher specialist
- Now with a 2-year warranty. Check the (promotional) terms and conditions at www.gallagher.eu/warranty
- Global presence with more than 6,000 points of sale in Europe

Would you like to know how the system works?
Visit www.gallagher.eu/i-series for more information or
scan the QR code to view the video.





M2800i



The M2800i is an extremely powerful energizer with 21 Joule stored energy, suitable for fences up to 53km. Unique external display enables you to operate and monitor the energizer from a convenient location (up to *50m optional), *3m cable is included. Expandable with remote control and maximal 6 additional fence monitors.

INCLUDED

SOLD SEPARATELY



> For more information about the accessories, please visit page 17

306315	M2800i excl. accessories	🔌 = 1
306308	M2800i incl. accessories	🔌 = 1

SPECIAL OFFER

FREE
REMOTE



The external display enables you to read out information about your fencing from a distance and to operate the energizer.

The energizer adapts to the fencing conditions in order to minimise the energy consumption.

M1800i



























The M1800i is a very powerful energizer with 14 Joule stored energy, suitable for fences up to 43km. The external display communicates with the fence. The system is expandable with maximal 6 fence monitors and remote control.



304304	M1800i	🔌 = 1
--------	--------	-------

SPECIFICATIONS i SERIES

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Options
MB2800i 315331	7000	6400	5400	21	14	53	20	11	120	     
MB1800i 315317	7000	7000	5200	14	10	43	17	9	75	     
M2800i 306315	7000	6400	5400	21	14	53	21	11	120	     
M1800i 304304	7000	7000	5200	14	10	43	17	9	75	     



i SERIES ACCESSORIES

- Energizer controller: Shows all your fence performance information in one convenient separate display box that can be placed up to 50m away from the energizer itself.
- Remote controller: to turn the fence on/off anywhere along the fence line. Integrated fault finder functions lead you to the problem in the fence. 'Inquire' function shows energizer display on the Remote Controller from anywhere on the fence. Compatible with M1800i and M2800i only.
- SMS controller: warns you via a text message when the fence voltage gets below a preset alarm level. In addition, the controller sends updates to your mobile phone.
- Alarm controller: to connect a flashlight and / or siren as an alarm.
- Siren/flashlight: these alarm accessories can be connected (single or multiple) to your mains energizers. They will warn you in case there is a problem with your fence.
- Inverter 12V/230V permanent solar: enables you to power all energizers from a 12V source. Ideal for solar projects where i Series technology is required.
- Inverter 12V/230V battery backup: to connect a 12V battery to the i Series as a back-up. If the mains power is lost this device will switch to battery power and take over, so you will always have a safe electric fence.
- SMS remote controller: to switch all mains energizers on and off by calling or texting with your mobile phone. So if you detect a fence failure, you can instantly repair your fence without getting a shock.

what is included?

							i SERIES				
Item							M1000	M1200i	M1800i	M2800i incl. accessories	M2800i excl. accessories
303376		Energizer controller for i Series	☞ = 1				0	▪	▪	▪	▪
507002		Remote controller for i Series	☞ = 1				X	X	0	▪	0
510002		Fence monitor for i Series	☞ = 1				X	X	0	▪	0
579009		i Series Alarm System	☞ = 1			**	0	0	0	0	0
567600		SMS controller i Series	☞ = 1				0	0	0	0	0
005215		Siren	☞ = 1			**	0*	0*	0*	0*	0*
005208		Flashlight	☞ = 1			**	0*	0*	0*	0*	0*
069392		Permanent solar/12V	☞ = 1			**	0	0	0	0	0
069408		Battery back-up	☞ = 1			**	0	0	0	0	0
557063		SMS remote control (GSM)	☞ = 1			**	0	0	0	0	0

* Only together with 579009

** Also compatible with other 230V energizers

▪ Included

0 Optional

X Not possible



Use the Energizers calculator on www.gallagher.eu to calculate which energizer is best suited to your situation.





230V

The Gallagher mains energizers are ideal for permanent fencing; they are top quality and offer plenty of power. All you need to do is connect them to the mains. Gallagher has a suitable solution for every type of fencing.

M1400



The M1400 is a sturdy mains energizer, suitable for fencing of up to 38 km. The energizer has a built-in lightning conductor and a LED bar on the front that shows the voltage of the fencing.



HIGH POWER ⚡ LOW PRICE



NEW

324319 M1400

⚡ = 1

M950



With the mains energizer M950 you can supply power to fencing of up to 30 km. The energizer has a LED bar on the front that shows the energizer's performance. It also has a built-in lightning conductor.



NEW

324302 M950

⚡ = 1

M550



A mains energizer with a fantastic price/quality ratio. The M550 has enough power for fencing of up to 25 km. The energizer has a simple, but sturdy housing with a power LED and is fitted with a lightning conductor.



NEW

323312 M550

⚡ = 1



M500



Strong conventional, low impedance, high voltage energizer with 5.2 Joules stored energy. Supplied with the latest digital technology providing trouble free usage for years. Suitable for long multiwire fences up to 23 km.



037137 M500

☎ = 1

M300



Strong conventional, low impedance, high voltage energizer with 3.2 Joules stored energy. Supplied with the latest digital technology providing trouble free usage for years. Suitable for multiwire fences up to 17 km.



380339 M300

☎ = 1

M200



Entry level energizer of the range, supplied with the latest digital technology providing trouble free usage for years. High voltage energizer with 1,9 Joules stored energy. Suitable for shorter multiwire fences up to 10 km.



032830 M200

☎ = 1

M160



Easy to operate mains energizer for shorter runs of fencing up to 9 km. Very easy to install. With integrated lightning protection.



384306 M160

☎ = 1

M120



Easy to operate mains equipment for shorter runs of fencing up to 8 km. Very easy to install using the wall clip supplied. With integrated lightning protection.



033333 M120

☎ = 1

M50



Easy to operate mains equipment for short runs of fencing, especially suitable for domestic pets. Very easy to install using the wall clip supplied. With integrated lightning protection.



038332 M50

☎ = 1




SPECIFICATIONS 230V ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Options
M1400 037137	7700	7700	4300	12	7,7	38	15	7	56	
M950 037137	7700	7700	3800	9	6,2	30	12	6	38	
M550 037137	9200	7000	3500	5,5	3,9	25	10	5	22	
M500 037137	9300	6200	2600	5,2	4	23	9	5	24	
M300 380339	8400	4800	1700	3,2	2,2	17	7	3	12	
M200 032830	7300	4200	1600	1,9	1	10	4	2	7	
M160 384306	7700	4600	1600	1,6	0,6	9	3,5	2,5	6	
M120 033333	7000	3800	1300	1,2	0,5	8	3	2	4	
M50 038332	7000	3300	1100	0,6	0,3	4	2	1	2	

If you don't have 230V available nearby or if you move your fencing regularly, you can use our 9V or 12V energizers. They don't need mains. To extend the lifespan of a battery, we have energizers with a range of saver settings.

394008	B300	 = 1
068609	Solar Assist Kit 6W	= 1

A black and orange portable power station, likely a Jackery model, with a handle and various ports. It features a digital display and two large circular ports on the top. The front has a large orange panel with a label and a handle. The side has a green and red connector.

393001	B200	 = 1
068586	B200 + 6W solar assist	 = 1
068609	Solar Assist Kit 6W	 = 1

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended battery (minimum)	Power consumption at 12V(mA)	Power consumption in saving mode (mA)	Suitable for solar panel (minimum)	Main features	Supply internal/ external
B300 394008	10000	5800	1600	2,6	2	20	8	4	15	Optima YT R3,7L	200	71	30W	   	
B200 393001	9000	4300	1400	1,45	1,1	13	5	3	10	Optima YT S2,7L	120	40	20W	   	
B100 392004	10000	3500	1100	0,8	0,55	7	3	1	4	Optima YT S2,7L	60	35	10W	   	 
B60 350301	8000	5500	800	0,7	0,48	6	2	0,5	3	Optima YT S2,7L	45	-	10W		



B100



Powerful battery energizer suitable for 9V and 12V battery use. Energizer for fencing up to 7km. Highly visible low battery and fence voltage indicator lights. Four easy to use Battery Save Options which can extend battery life by up to 12 months. Ideal in combination with solar energy.



392004	B100	☞ = 1
068609	Solar Assist Kit 6W	☞ = 1

B60 (12V - 0,7 J)



Entry level 12V battery powered energizer capable of powering up to 6km or 3 hectare of Multi-wire fence. Providing an effective electric shock on the fence from a small and easy to mount Energizer the B60 is designed for customers who require simplicity.



350301	B60	☞ = 1
--------	-----	-------

B50



Powerful device supplied by a 9 V disposable or 12 V storage battery. The LED shows red if battery voltage is low. 3 settings: full power, night mode and random. Battery savings options on 9 V battery (not 12V). Comes with connection for solar panel. Includes earth stake.



028931	B50	☞ = 1
--------	-----	-------

B40



The world's most energy efficient battery energizer! Only 9mA use in night safe mode. This means secure animal safety and ultra low battery consumption. Earth stake included.



386317	B40	☞ = 1
068579	B40 + 4W solar assist	☞ = 1

B35



The B35 is a 9V Battery powered Energizer capable of powering up to 4 km or 1.5 hectare of Multi-wire fence. Providing a portable Energizer solution that is light and easy to move.

356433	B35	☞ = 1
7608	Stander B20/B35	☞ = 1





B20



Feature-packed battery-operated device, powers fences up to 2km (without vegetation). Very easy to use. It operates on a 9V disposable battery or a 12V rechargeable battery. The device warns you when the battery is almost flat.



028818	B20	☞ = 1
7608	Stander B20/B35	☞ = 1

B11



Robust Battery-unit on self-supporting stand with carry handle for simple installation. Features 4 Battery Save Options that can be selected using the external switch. Built-in indicator light flashes with each pulse. 12V battery leads and 6x1,5V batteryset included.



013534	B11 incl. 6x1.5V batteries	☞ = 1
--------	----------------------------	-------

B10



Robust Battery-unit, has a built-in indicator light that flashes with each pulse. Ideal for strip grazing & protecting gardens from small animals. Operates by 6 x 1,5V Alkaline batteries D-cell LR20 (not included), also suitable for 12 Volt lead/acid battery, 12V adapter kit available (004747).



003634	B10	☞ = 1
--------	-----	-------

SPECIFICATIONS 9V ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended power supply	Power consumption at 9V(mA)	Power consumption saving mode (mA)	Main features	Supply internal/external
B50 028931	8200	2900	1000	0,5	0,3	4	2	2	9V-160Ah	50	24		
B40 386317	7900	2100	500	0,4	0,27	4	2	2	9V-120Ah	40	9		
B35 356433	8300	1800	700	0,35	0,27	4	1,5	1,5	9V-55Ah	33	-		
B20 028818	9200	1800	800	0,20	0,15	2	1	1	9V-55Ah	25	-		
B11 013534	8200	1500	500	0,11	0,09	1	-	0,5	6X1,5V	20	-		
B10 003634	7900	1200	400	0,1	0,07	1	-	0,5	6X1,5V	15	-		

WHICH BATTERY FITS THE FOLLOWING PORTABLE ENERGIZERS

		B20 028818	B35 356433	B40 386317	B50 028931	B100 392004	B200 393001	B300 394008	S10 341309	S16 341216	S20 341323	S40 345307	S100 346304	S200 360300	S400 361307
6Volt	075188 - 4Ah								■	■	■				
	200590 - 7Ah														
	000459 - 10Ah											■			
9Volt	007578 - 55Ah	■	■	■	■										
	008704 - 120Ah	■	■	■	■										
	008711 - 160Ah	■	■	■	■	■ (2x)									
	048588 - 175Ah	■	■	■	■	■ (2x)									
	063451 - 210Ah	■	■	■	■	■ (2x)									
12Volt	047024 - 5Ah														
	000442 - 7,2Ah												■	■*	■*
	047031 - 12Ah														
	033553 - 25Ah	■	■	■	■										
	033515 - 65Ah					■	■	■							
	004171 - 85Ah					■	■	■							
	033409 - 105Ah														
12Volt Optima	059621 - S2,7L					■	■	■							
	059614 - R3,7L					■	■	■							
	062096 - S5,5L														

* Parallel placement of two pieces is possible (= 12V + 2x 7.2Ah = 14.4Ah)

SOLAR

Are you looking for an energizer that provides free energy and is environmentally friendly too? Go for solar! The Gallagher solar range consists of energizers with an integrated solar panel. We also have individual solar panels and batteries that can be used with 9V/12V energizers.



NEW



S400



The S400 is the powerhouse of solar energizers. With the S400 you can power fencing of up to 30 km without any difficulties. The S400 has a powerful 40W solar panel. With the built-in smart battery management, the energizer works several weeks without daylight. It ensures you have current on your fencing all year round.

361307 S400 incl. 2 batteries (12V - 4,0 J) ⚡ = 1

S200



The S200 is a portable solar energizer, suitable for fencing of up to 20 km. The S200 has a functional 20W solar panel. The energizer is easy to install and still puts enough current on the fencing after several weeks without daylight.

NEW



360300 S200 incl. 2 batteries (12V - 2,0 J) ⚡ = 1



S100 incl. battery



With the S100 it is easy to place fencing of up to 10 km without you having to charge the battery. This powerful energizer works on solar power, is quick to install and easy to transport. No more hassle with empty batteries, with the S100 you still have power, even after 3 weeks without sunshine!



346304	S100 incl. battery	☞ = 1
000442	12V 7.2Ah Battery S100, S200, S400	☞ = 1

S40 incl. battery



The S40 is the ultimate energizer for fencing of up to 5 km. The energizer is quick to install and easy to transport. The energizer will work for 3 weeks without sunlight and has a built-in lightning conductor. This makes the S40 an excellent alternative to a battery-operated system.



345307	S40 incl. battery	☞ = 1
000459	6V 10Ah Battery S40	☞ = 1

S20 Incl.battery and solar mount



Do you regularly move your animals to a different pasture? Your fencing is less than 2 km long? The S20 is your ideal choice. This energizers works on solar power and is environmentally friendly and maintenance free. It is also easy to move and fall-resistant.



341323	S20 incl. battery and mount solar post	☞ = 1
075188	6V 4Ah Battery S10, S16, S20	☞ = 1

S16 incl. battery



The S16 is the ultimate portable Energizer solution, storing 0.1 J and capable of powering up to 1 mile/1,5km or 0.5 hectare of Multi-wire fence. The Energizer comes complete with a rechargeable battery and solar panel. The S16 is quick and easy to install and convenient to transport. This robust and highly portable unit makes a great alternative to battery-powered systems.



341316	S16 incl. battery	☞ = 1
075188	6V 4Ah Battery S10, S16, S20	☞ = 1

SPECIFICATIONS SOLAR ENERGIZERS

	Maximum output voltage (V)	Voltage with a resistance of 500 Ohm (V)	Voltage with a resistance of 100 Ohm (V)	Stored energy (J)	Maximum impulse energy (J)	Without vegetation (km) (recommended)	Light vegetation (km) (recommended)	A lot of vegetation (km) (recommended)	Fencing surface (ha) (recommended)	Recommended battery (minimum)	Power consumption (V/ mA)	Built-in solar panel (Watt)	Main features	Supply internal/ external
S400 361307	9600	6000	2400	4,0	3,1	30	16	7	16	2x 12V-7.2Ah	12/321	40W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞
S200 360300	9600	4000	1200	2,0	1,6	20	10	5	8	2x 12V-7.2Ah	12/171	20W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞
S100 346304	9600	3600	1600	1,0	0,74	10	5	3	6	12V-7.2Ah	12/43	7W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞
S40 345307	7900	2300	800	0,40	0,26	5	3	1,5	5	6V-10Ah	6/46	4W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞
S20 341323	7900	2100	500	0,20	0,14	2,5	1	0,5	1,2	6V-4Ah	6/29	1,5W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞
S16 341316	7000	2000	500	0,16	0,12	1,5	0,5		0,8	6V-4Ah	6/17	1,5W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞
S10 341309	7000	1600	500	0,10	0,08	1	0,3		0,5	6V-4Ah	6/14	1,5W	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞	☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞ ☞



S10 incl. battery



The S10 is the latest solar energizer suitable for the hobby market and short fences <1 km>. The energizer is quick and easy to install and will work for up to 3 weeks without sun and is capable to power through the harshest winters. The S10 is super tough making it drop resistant and waterproof. The Energizer comes complete with a rechargeable battery and solar panel.



Mount Solar post S10, S16, S20



Install the S10, S16 or S20 energizer on a Gallagher Ring Top Post using the Post Mount.



341309 S10 incl. battery ☞ = 1

075188 6V 4Ah Battery S10, S16, S20 ☞ = 1

571102 Mount Solar post S10, S16, S20 ☞ = 1

S230



The ultimate solar combination: the trusted B200 with 1.45 Joules stored energy (for fences up to 13km), powered by an Optima Yellow top, that is charged by a 30W solar panel. For a reliable and maintenance free operation for many years.



S220



The ultimate solar combination: the trusted B200 with 1.45 Joules stored energy (for fences up to 13km), powered by an 2,7L Optima Yellow top, that is charged by a 20W solar panel. For a reliable and maintenance free operation for many years.



060870 S230 (B200+30W+Optima 3,7l) ☞ = 1

061556 S220 (B200+20W+Optima 2,7l) ☞ = 1

S280



Is your fencing longer than 13 km but shorter than 20 km? The S280 is the solution you're looking for. This special offer consists of a B280 Multi Power energizer, a carry box with brackets, a 30 Watt solar panel and an Optima 3.7L battery.



S180



Add the S180 and you have the complete package. This special offer consists of a B180 Multi Power energizer, a carry box with brackets, a 20 Watt solar panel and an Optima 2.7L battery. This gives you a complete solution for fencing of up to 13 km.




075843 S280 ☞ = 1

075836 S180 ☞ = 1

Solar assist kit



Solar assist kits 4W & 6W fits within a minute, 4W with the B40 & B50 energizers and the 6W with the B100, B200 & B300 energizers. It doesn't charge the battery but doubles battery life.



068593 Kit 4W (B40/B50) ☞ = 1

068609 Solar Assist Kit 6W ☞ = 1



SPECIFICATIONS SOLAR KITS

	Energizer (included)	Battery (included)	Solar panel / Watt (included)	Bracket for solar panel	Carry box / Solar carry box
S280 075843	B280	Optima YTR3,7L	30W	Integrated	Included
S230 060870	B200	Optima YTR3,7L	30W	Included	Integrated
S220 061556	B200	Optima YT S2,7L	20W	Included	Integrated
S180 075836	B180	Optima YT S2,7L	20W	Integrated	Included



SOLAR PANELS

- Gallagher provides top-quality, tested solar panels with a 2-year warranty on all modules.
- Solar power is environmentally friendly and an increasingly popular economical energy provider.
- All solar panels have a controller that protects the battery against overcharging.
- The range is completed with galvanised brackets, bolts and clamps.
- All solar panels have polycrystalline cells for maximum energy yield.
- Solar panels can be used with mains energizers if you use a converter (item no 069392).

Calculate the solar panel you need
with the solar-panel calculator at
www.gallagher.eu/choose-solar-panel



SOLAR PANELS IN COMBINATION
WITH BATTERY ENERGIZERS
EXTEND THE LIFESPAN OF YOUR
BATTERY

TIP!

Solar panel

12v 2

Polycrystalline high-performance solar module with optimised low-light and temperature features. Shock-resistant and hardened solar glass with self-cleaning surface and sturdy aluminium frame. Complete with power cable. Very easy fitting. More than 20 year service life.



041701	10 Watt incl. 2A regulator	☞ = 1
041732	20 Watt incl. 2A regulator	☞ = 1
041725	30 Watt Incl. 10A regulator	☞ = 1
027897	50 Watt incl. 10A regulator	☞ = 1
041718	60 Watt incl. 10A regulator	☞ = 1

Solarbracket B100/B200/B300 V2.0

Bracket for mounting a 10W, 20W or 30W GE Solarpanel to a B100, B200 or B300 Energizer.



068709	Bracket for 10W/20W/30W GE Panel	☞ = 1
069774	Solar bracket 10/20/30W Panel	☞ = 1
069781	Solar bracket 50/60W Panel	☞ = 1

Regulator

12v 2

Part.nr. 068838 2A regulator for 10W and 20W Solarpanel.
Part.nr. 068845 10A regulator for 30W, 50W and 60W Solarpanel.



068838	2A for 10W/20W Panel	☞ = 1
068845	10A for 30W/50W/60W Panel	☞ = 1



SPECIFICATIONS SOLAR PANELS

	Length x width x height (mm)	Weight (kg)	Nominal peak power (Wp)	Voltage at nominal power (Vmp)	Current at nominal power (Imp)	Voltage at open circuit (Voc)	Short-circuit current (Isc)	Operating temperature	Maximum system voltage (DC)	Solar cell	Suitable for	Min. recommended 12V battery / Ah	High-efficiency crystalline cells	Aluminium frame	Bracket for post, wall, theft-proof cabinet assembly, (not included)	Bracket for fitting on battery box B100, B200, B300 (not included)	Controller	Battery connection cable (m) included	Includes crocodile clip
10 Watt 041701	340 x 280 x 17	1,1	10Watt	17.3	0.59A	21.6	0.65A	-40C tot +85C	1000V	Poly-crystalline	B20, B35, B40, B50, B100	25/65	▪	▪	069774	068709	2Amp	2	▪
20 Watt 041732	340 x 450 x 25	1,8	20Watt	17.5	1.15A	22.0	1.27A	-40C tot +85C	1000V	Poly-crystalline	B60, B80, BX50, B100, B200	65/85	▪	▪	069774	068709	2Amp	2	▪
30 Watt 041725	340 x 635 x 25	2,5	30Watt	17.5	1.72A	22.0	1.90A	-40C tot +85C	1000V	Poly-crystalline	B180, B200, B300	85	▪	▪	069774	068709	10Amp	3	▪
50 Watt 027897	660 x 530 x 35	4,2	50Watt	17.5	2.86A	22.0	3.17A	-40C tot +85C	1000V	Poly-crystalline	B280	105	▪	▪	069781		10Amp	3	▪
60 Watt 041718	660 x 630 x 35	5,0	60Watt	17.5	3.43A	22.0	3.80A	-40C tot +85C	1000V	Poly-crystalline	B280	105	▪	▪	069781		10Amp	3	▪





WHICH TYPE OF FENCING SUITS YOUR ANIMAL

The type of electric fencing that is best for you depends on your situation. Which animals do you keep? Are you looking for permanent or portable fencing? Would you like installation convenience or do you prefer minimal maintenance? All these questions determine your choice. Gallagher has a solution for every situation. We will be pleased to advise you!



FENCING SOLUTIONS

Permanent

Gallagher has permanent fencing available for every type of animal. For example, High Tensile is ideal for cattle or game and lasts up to 25 years. For horses, Gallagher recommends EquiFence. EquiFence is the most durable fencing for horses and is extremely safe because of the protective plastic cable.

Gallagher has the complete range of permanent fencing - from durable insultimber posts, top-quality conductors to robust insulators.

Semi-permanent

At times you may wish to put up fencing for a longer period of time without it being permanent, when you lease pasture for example. In those situations Gallagher provides the solution with semi-permanent fencing.

Portable fencing

If you move the animals several times a year, we recommend portable fencing. Gallagher has a solution for every situation. For example, the SmartFence 2.0 is the ideal solution for sheep and goats.



10-YEAR SYSTEM WARRANTY

If you use materials recommended by Gallagher: Ecoposts, Insultimber posts, Insulated Line Post, ElectroMax fencing wire, Equifence, reinforced S corner insulators, fixing wires, tension springs, rotating tensioners, Gallagher provides a 10-year system warranty.


Use the Fencing calculator
to discover the type of fencing that is
best suited to your situation.
www.gallagher.eu/compose-electric-fence





COMPLETE RANGE

After you have chosen the most suitable energizer, it is important to choose the correct parts. This Chapter contains an overview of all the other Gallagher products. Every single one of these products is guaranteed top quality!

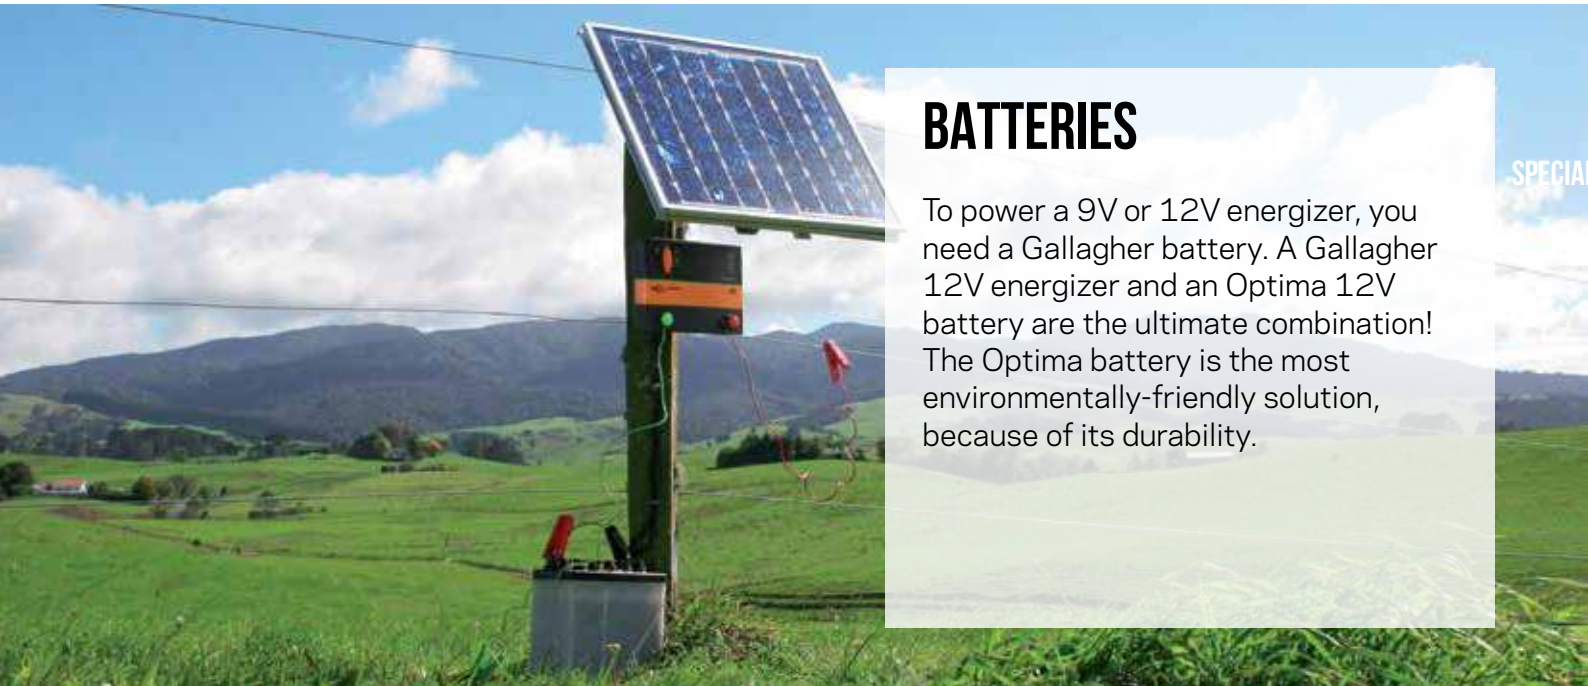

BATTERIES

To power a 9V or 12V energizer, you need a Gallagher battery. A Gallagher 12V energizer and an Optima 12V battery are the ultimate combination! The Optima battery is the most environmentally-friendly solution, because of its durability.

Duo pack battery 9 volt

9v

Environmentally friendly alkaline 9V battery for use with 9V battery powered energizers. Alkaline Batteries give you up to 30% better performance than Air Oxygen batteries. Suitable for all Gallagher 9V energizers.



007578	55Ah (160x110x115mm)	⚡ = 1
008704	120Ah (160x110x115mm)	⚡ = 1
008711	160Ah (190x125x160mm)	⚡ = 1
048588	175Ah (190x125x160mm)	⚡ = 1
063451	210Ah (190x125x160mm)	⚡ = 1



Battery SLA 12 volt

12v

Maintenance free batteries. Suited for powering battery energizers. The 25Ah is a sealed lead/acid battery. Fits into the case of our 9Volt energizers when using a solar panel.



033553



033515

033553	25Ah (166x175x125mm)	☞ = 1
033515	65Ah (242x175x190mm)	☞ = 1
004171	85Ah (278x175x190mm)	☞ = 1
033409	105Ah (353x175x190mm)	☞ = 1

Battery charger CTEK (12V)

12v 5

Most batteries loose charge during winter time. Prevent this by connecting your battery to this maintenance charger. Your battery will remain charged! Essential for your battery during winter time. This charger is capable to charge all batteries up to 105Ah.



056707	XS 0.8 EU (12V)	☞ = 1
567299	XC0.8 (6V)	☞ = 1

Round battery

6v

Environmentally friendly alkaline 6 Volt battery 90 Ah for use with battery powered energizers.



055661	6V/90Ah	☞ = 1
--------	---------	-------






THE BENEFITS OF OPTIMA 12V BATTERIES

THE OPTIMA BATTERY ENERGIZER IS THE MOST ECONOMICAL AND MOST ENVIRONMENTALLY-FRIENDLY SOLUTION, BECAUSE OF ITS DURABILITY.

- Ideal for seasonal use.
- Guaranteed the best purchase.
- Very good charge acceptance.
- Smaller than traditional battery energizers, easy to carry.
- Ideal for winter storage because of its very low self-discharge.
- Cost savings, as it lasts more than twice as long.
- It combines ideally with solar panels, because of its minimal internal resistance.

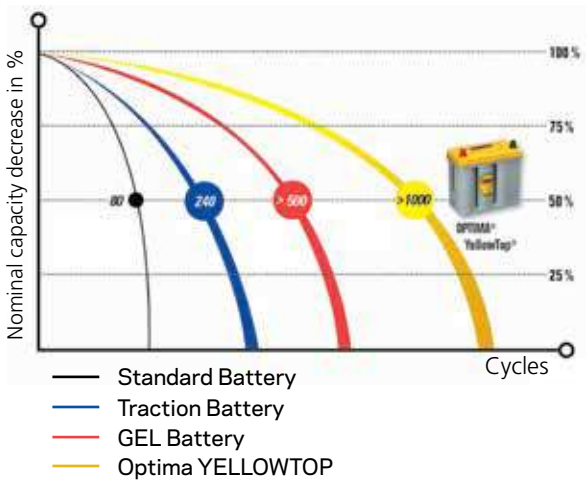

	059621 S2,7L	059614 R3,7L	062096 S5,5L
Length in mm	228	229	317
Total length in mm	237	237	325
Height without posts in mm	201	168	218
Height with posts in mm	227	197	238
Width in mm	121	172	158
Total width in mm	129	172	165
Nominal voltage (V)	12	12	12
Cold start power (EN)	460	660	975
Capacity in Ah (EN)	38	48	76
Reserve capacity (BCI) in Min	66	98	155
Weight in KG	11,8	16,6	26,5

CHARGE YOUR BATTERY REGULARLY
DURING THE WINTER MONTHS!

TIP!

Optima Yellowtop S2,7L

12v

Uncompromising Quality! This Optima S2,7L 12V battery can be compared with a regular 65Ah 12V battery, but is smaller in size, lighter in weight and has a longer life. Ideal for use with solar modules. Extremely fast recharge with all common, regulated chargers.
Volume 2,7 litres, dimensions L237xH227xW129mm.



059621	Optima S2,7L	☞ = 1
059614	Optima R3,7L	☞ = 1
062096	Optima S5,5L	☞ = 1

EARTHING

Earthing ensures that the current can flow back to the energizer as soon as an animal touches the fence. No earthing means no current on the fencing, which is essential to good fencing!



Bentonite super earthing mix

Earthing can be achieved simply and quickly with this mix, even in extremely dry conditions. The mixture of salt and absorbent clay retains moisture and increases the conductivity of the surrounding soil. To be used in poor earthing conditions and in combination with more powerful energizers. Excl. earth stake.



008773 Bentonite

☞ = 1

Lead out cable ø2,5mm XL

10

XL wire coated with a heavy duty double insulation. Good quality polyethylene for abrasion resistance in the ground. 2,5mm medium tensile aluminium coated wire 4 times the conductivity of 2,5mm galvanized wire. Ideal for carrying power long distances underground. For use between earth stakes.



016276 ø2.5mm XL - 200m

☞ = 1

Lead out cable

2

Double insulated lead-out cable to connect the energizer with the fence and to make underground connections (e.g. gateways). Use this cable for short distances. For distances over 30m use 2.5mm cable.



065028 ø1.6mm - 10m - 100 Ohm/1km ☞ = 1

066097 ø1.6mm - 25m - 100 Ohm/1km ☞ = 1

021604 ø1.6mm - 50m - 100 Ohm/1km ☞ = 1

065011 ø2.5mm - 25m - 35 Ohm/1km ☞ = 1

062712 ø2.5mm - 50m - 35 Ohm/1km ☞ = 1


021611 ø2.5mm - 100m - 35 Ohm/1km ☞ = 1

162713 ø2.5mm - 400m - 35 Ohm/1km ☞ = 1

Earth stake

2

Without a proper Earth System your energizer will not perform. Always use galvanised earth stakes. Battery Energizers: Earth Stake length 1m c/w clamp.

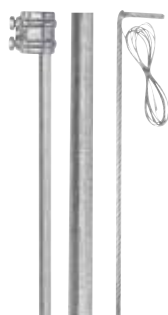

029037 2m with earth clamp

☞ = 3

029020 1m with earth clamp

☞ = 3

008735 Earth stake 1m (excl. earth clamp)

☞ = 1

044030 Earth clamp

☞ = 1

Earthing accessories

2

Earth clamp: guarantees a good connection between the earth stakes and lead-out cable from the energizer. Lead out joint kit: for a secure, waterproof connection of lead out cable without power loss.



044030 Earth clamp

☞ = 1

063796 Lead-out connector

☞ = 2

044023 Earth socket

☞ = 1



SECURITY MEASURES AND TESTERS

Would you like to prevent your animals from escaping as result of a lack of current? Would you like to know what caused the short-circuit in your fencing? Do you want to protect your energizer against a lightning strike? You can with our range of protectors and testers!

Cut out switch


By using a switch, you can divide your fence into several sections and switch them on and off independently of each other. This will also help you trace any faults that occur.



060705 Cut out switch ⚡ = 1

Knife Cut-Off Switch

This switch helps you to switch off a part of the fencing for maintenance, for use for passages and gates or when you are looking for faults. The switch also offers the option to divide the fence into different plots. It can also be used to switch the fence on or off on the spot. The switch is made of stainless steel, visible from a distance, and is supplied with fitting screws.

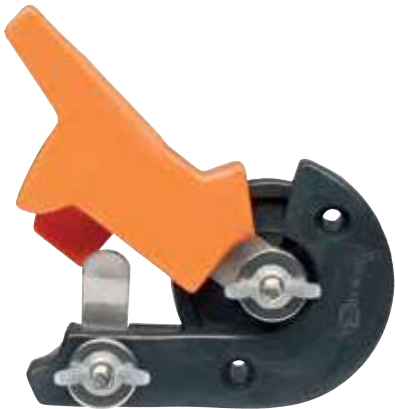

000770 Knife Cut-Off Switch ⚡ = 1

Lightning diverter

The only adjustable lightning diverter on the market, suitable for every energizer. Protects the energizer against damage through lightning by diverting the lightning from the fence to ground (earth). The lightning diverter needs to be mounted between the fence and the energizer. Can withstand multiple lightning strikes.



064802 Lightning diverter ⚡ = 1

Flood gate controller

Device especially for ditches that can be mounted on a fence. It stops the current flowing through the bottom line if the water (or another resistance) reaches the bottom wire. The rest of the wires will keep its voltage. Has a resistance of 5600 Ohm.



1506 Flood gate controller ⚡ = 1

Security kit

The Security Kit protects your Maxi master from possible theft. The kit is very easy to install and can be used with all B100, B200, B300, S220 and S230 models.



057002 Security Kit ⚡ = 1



Vandal proof box

2

A galvanised box that protects battery and fence units. To deter vandals, the box is connected to the energizer and can be locked with a padlock (not included). Fits max.350x160x240mm sized Energizers and max.360x260x230mm sized Battery. Dimensions incl.foot, 395x295x500mm. Suitable to place on Insultimber post 10x10cm, (not included, partnr. 017904). Ideal for B60/B80/B180/B280 and others.



019410 Vandal Proof Box ☞ = 1

Battery energizer box

2

Portable box for electrical equipment and batteries. Maximum size of the battery 34 cm deep x 23 cm wide. Suitable for B60/B80/B180/B280. Other energizers will fit with little changes.



025237 Battery energizer box ☞ = 1

Gallagher Solarbox

Portable box for energizer, battery and solar panel. Suitable for:
Max. size of energizer: 380x110x300mm (lxwxh).
Max. size of battery: 330x175x240mm (lxwxh).
Gallagher solar panel 10W, 20W and 30Watt.



073511 Gallagher Solarbox ☞ = 1

077328 Solarbox bracket 50W & 60W Solarpanel ☞ = 1

Lead set

						9V			12V/230V			Solar			
						B10	B20 B35	B40 B50	B60	B80 B180 B280 MB1000	B100 B200 B300	S10 S16 S20 S40 S100	S17 S22	S20 S50	S220 S230
004938		Cable set to connect the energizer to the fencing and the earthing.	☞ = 1				■			■			■	■	
201276		Cable set to connect the energizer to the fencing and the earthing.	☞ = 1					■		■	■			■	■
005499		Cable set to connect a 9 Volt energizer to a 12 Volt battery.	☞ = 1				■								
001015		Replacement cable set to connect the B60 to a 12V battery.	☞ = 1						■						
004747		Cable adapter to connect a B10 to a 12 Volt battery.	☞ =			■									
201283		Cable set to connect an energizer to a battery.	☞ = 1					■			■				■
053865		230V/12V adapter to connect MultiPower energizers to 230V.	☞ = 1				■	■		■	■				

* In combination with cable set 201283

** In combination with cable set 005499



Crocodile clip



Crocodile clip



400174	Black	🔌 = 5
400204	Red	🔌 = 5
400211	Green	🔌 = 5

EU Warning sign (universal)



Warning signs must be attached to any electric fence every 50 metres wherever the fence borders a public right of way.



075881	EU Warning sign (universal)	🔌 = 1
--------	-----------------------------	-------

Live fence indicator



The Live fence indicator is fitted to the fence and flashes with each pulse of the energizer so you can see whether the fencing is still working correctly.



511009	Live fence indicator	🔌 = 1
--------	----------------------	-------

Neontester



A convenient tool for checking whether there is sufficient voltage at the electric fence. Not suitable for checking earth systems.

Range: Led 1, 1,0kV > 1,8kV, Led 2, 1,9kV > 2,5kV, Led 3, 2,6kV > 3,8kV, Led 4, 3,9kV > 4,8kV, Led 5, 4,9kV >



015019	Neontester	🔌 = 1
--------	------------	-------

Fault Finder



Pinpoints faults quickly and easily whatever type of wire or energizer is used. By simultaneously measuring the current flow and voltage, the Fault Finder will follow the current flow to any one of a series of faults.



509051	Fault Finder	🔌 = 1
202068	Battery Fault Finder	🔌 = 1

Fence Volt Meter



Supplies exact information on the condition of your fence. Makes targeted trouble shooting very easy. Auto ON/OFF. Helpful tool for checking earthing system. Powered by one 9V battery (a life of 6-12 months). Displays fence voltage from 100V up to 12kV.



015033	Fence Voltmeter	🔌 = 1
--------	-----------------	-------


GUARDING YOUR ANIMALS

The SMS Fence Alarm is a unique plug and play security system for your fence. In comparison with the existing systems, this product is a true breakthrough. It warns you with a text message if there is insufficient voltage (e.g. due to vegetation) or when the fencing is interrupted (e.g. when a gate is opened). You can divide your fence into 2 zones for accurate problem detection. It works for a whole season on 3 standard batteries (not included).

SMS fence alarm



The SMS fence alarm is a unique plug & play security for your fence. Compared with the existing devices this product is in another league. The SMS Fence alarm warns you via SMS if the voltage is too low.



055654	SMS fence alarm	🔌 = 1
--------	-----------------	-------



WHY SHOULD I INSTALL A SMS FENCE ALARM?

- Theft (*).
- Certainty that there is sufficient voltage at the end of the fencing.
- Works independently. Does not have to be connected to the energizer's battery (100% self-sufficiency).
- An immediate alert in the event of theft of the energizer.

(*) As it is vulnerable to theft, it is recommended to install the Fence Alarm separate from the energizer



POSTS

Gallagher has two types of posts - posts for temporary fencing and posts for permanent fencing. The permanent posts - Gallagher post, Eco post and Insultimber post - differ from each other in terms of quality, sustainability and price. We also have portable posts in various types and sizes, including plastic posts, fibre-glass posts and metal posts. Each type has its own application.



Insultimber (FSC®)



Unique insulating posts where the use of insulators isn't necessary. Maintenance free. Long life time. 10 years guarantee.

017898 Strainer Post 8.0x8.0cm - 2.00m 🐄 = 1

017997 Strut 4.0x8.0cm - 2.00m 🐄 = 1

007847 Post 5.0x5.0cm - 2.10m 🐄 = 1

007724 Post 3.8x3.8cm - 1.80m 🐄 = 1


007601 Post 3.8x3.8cm - 1.50m 🐄 = 1

007854 Dropper 3.8x2.6cm - 1.56m 🐄 = 1

007733 Dropper 3.8x2.6cm - 1.26m 🐄 = 1

019403 Dropper 3.8x2.6cm - 1.10m 🐄 = 1

007618 Dropper 3.8x2.6cm - 0.95m 🐄 = 1

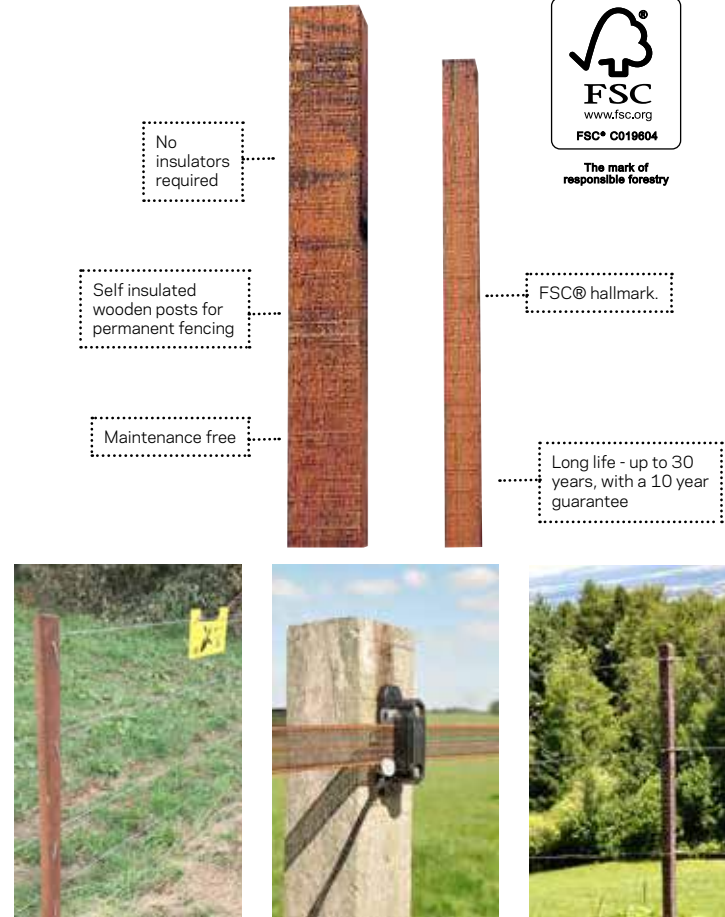

Eco post



Plastic Eco Post, made from 100% single source, recycled material (polypropylene). The material together with the cross-shaped section (Ø 70mm), guarantees the strength of the post. No insulators needed. Up to 70% more cost effective than traditional (non-electric) fencing.

009527 1.50m 🐄 = 4

009534 1.85m 🐄 = 4



 = 12



 = 20



**UNIQUE
IN THE
MARKET**

- TESTIMONIAL -

Problem solved!


The new Gallagher Insulated Line Post is a true revolution in the fencing-post market. The post insulates perfectly, is just as sturdy in the ground as a wooden post, is just as easy to set up, has the flexibility and convenience of a fibreglass post during transport and is just as durable as a hardwood post.

Extremely cost-efficient solution!

With this post, a farmer creates extremely cost-efficient permanent fencing, because you can insert the post by hand and you don't need heavy machinery. Afterwards you can remove the post by hand and reuse it in other leased pasture. The post is also extremely compact and you do not need a special transport company to get it to your destination. You need relatively few posts for sturdy fencing - the distance between the posts on flat land is 7-12 metres.

Mark Harris

Product Manager Gallagher New Zealand

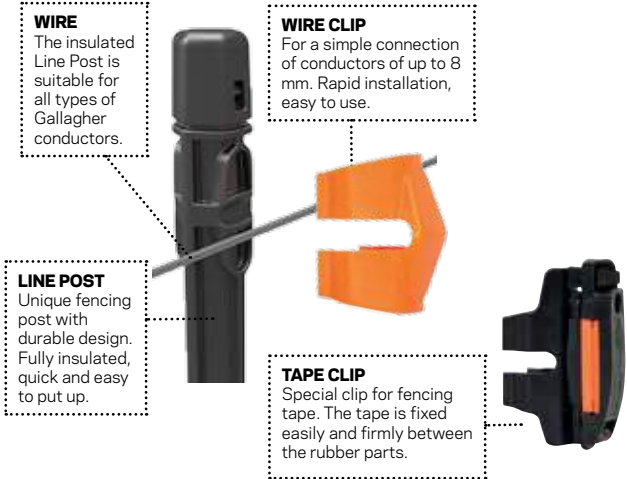

Rammer Line Post



Special rammer for convenient hammering in of a Gallagher Line post.



525013 Rammer Line Post = 1

Sleeve for Line Post rammer



Sleeve for Line Post rammer 1350mm.



530031 Sleeve for Line Post rammer = 1

Line Post Pilot



Line Post Auger to easily place Gallagher Line Posts in hard ground. Handy tool designed specifically for the Gallagher Line Post.



540016 Line Post Pilot = 1

Universal Post Lifter



Post Lifter, suitable for the Line Post lifter adapter To easily pull out the Gallagher Line Post.



527000 Universal Post Lifter = 1


527017 Line Post Adapter = 1



A PORTABLE POST FOR ANY SITUATION!

Light and easy to move

Gallagher also has portable posts in various types and sizes, including plastic posts, fibreglass posts and metal posts. They are all light-weight and easy to move. For example, we have plastic posts with wire holders so you do not need any loose insulators. The tread-in post has been developed specifically for portable horse fencing. You can take 50 of these smoothly finished posts in one hand when you fence off your pasture. You already know the spring steel post with pigtail insulator.

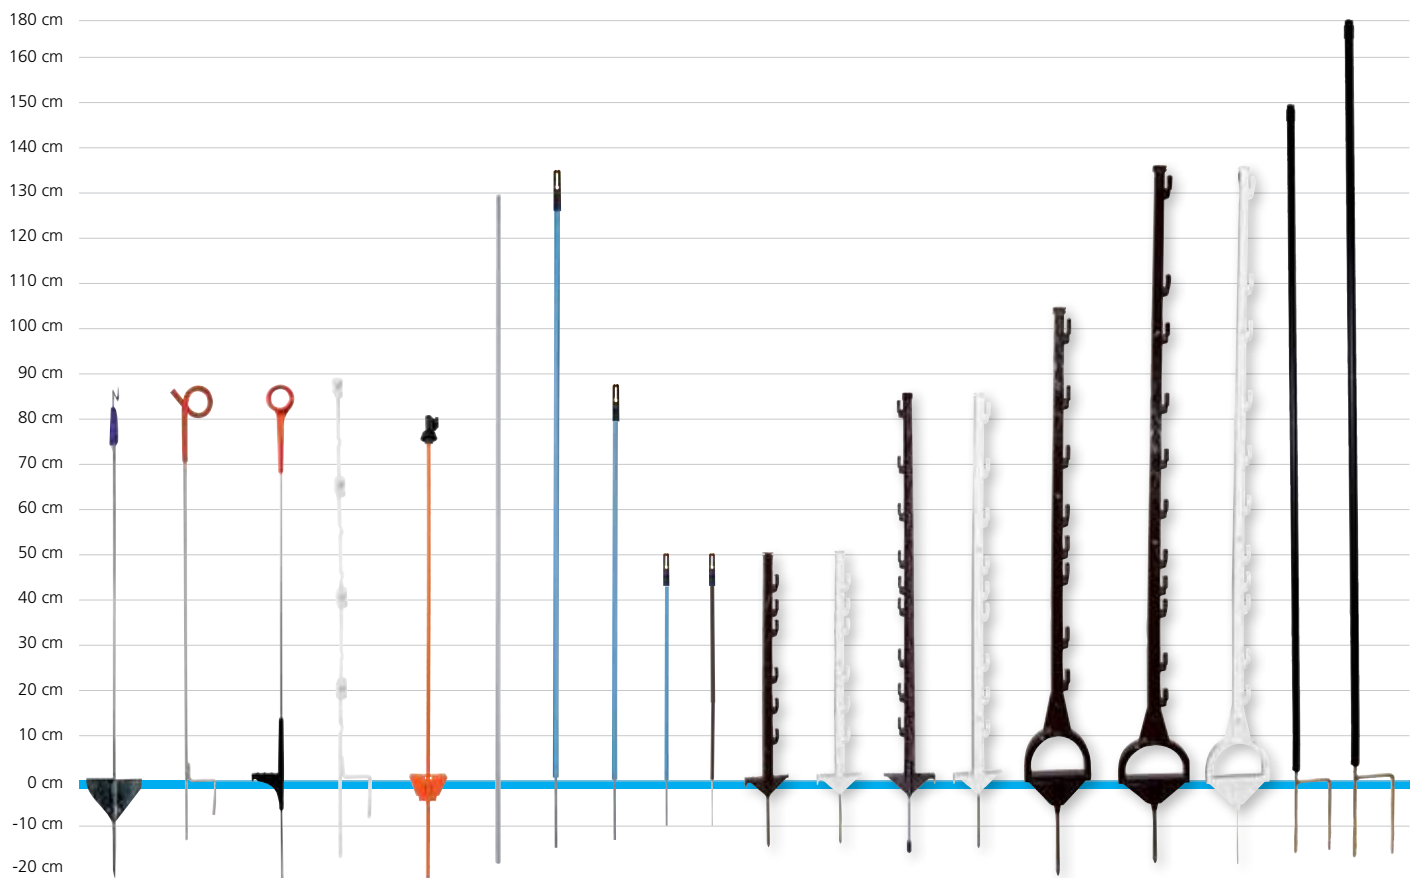

Ring Top post



The most popular option for dairy and beef cattle, practical design for stronger posts, no tangling and better grip in the ground.



PATENT

Super tough over-moulded GF nylon head eliminates shorting and prevents wearing through

Unique head centred over shaft with no protrusions or trapping points to significantly reduce tangling

Easy to use and install even in hard ground.

Long insulation sections strengthen shaft and provide insulation when handling to prevent shocks

Tough unbendable foot plate can withstand 200kg of pressure



Steel pigtail post



Strong mild-steel post with blue top-insulator and large welded on foot for easy tread-in installation. Use part 004218 or 010950 if you use more wires. Maximum fence height: 0.88m.

019250	Spring steel oval post 1.10m	⚡ = 10
008155	Top insulator for 019250	⚡ = 5
004218	Screw-on tape insulator	⚡ = 10
010950	Screw-on rod Black ø4-10mm	⚡ = 20



Spring steel post



Sturdy steel post. If several wires are to be used, add insulator # 010752. Maximum fence height: 0.80m.



008902	Orange - 1.00m	⚡ = 1
019274	Orange - 1.00m	⚡ = 50
009411	Top insulator for 019274/008902	⚡ = 5
010752	Insulator for 008902/019274	⚡ = 10

PVC plastic post



Very practical and simple grazing post. Unique top insulator which is resistant to damage if you knock the post into the ground with a hammer.




024391	Blue - 0,50m + 0,20m spike	⚡ = 10
024407	Black - 0,50m + 0,20m spike	⚡ = 10
024414	Blue - 0,85m + 0,20m spike	⚡ = 10
024421	Blue - 1,35m + 0,20m spike	⚡ = 10
2211	Top insulator for PVC plastic post	⚡ = 1
003266	Clips for PVC post 13mm	⚡ = 10
004218	Screw-on tape insulator	⚡ = 10

Deer post plastic



Simple solid post for mobile fences to 1.50 m (# 063475) or 1.80 m (# 063482). Wire clips # 063499 to assemble at any desired height. Top insulator is removable so clips can easily be confirmed.

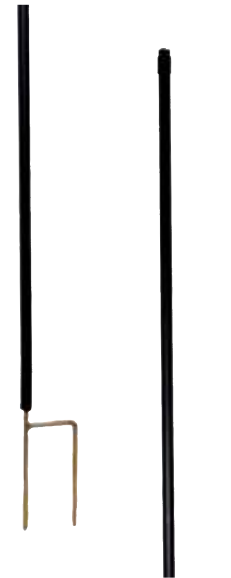

063475	Black - 1.70m	⚡ = 10
063482	Black - 2.00m	⚡ = 10
063499	Clips for PVC post 19mm	⚡ = 25

Fibre glass post



Fibreglass post 10mm for semi-permanent fences. Ideal in combination with polywire or 1,6mm High Tensile wire.



008172	Post ø10mm - 1.50m	⚡ = 1
008158	Post ø10mm - 1.25m	⚡ = 50
018300	Clip fibreglass post ø10mm	⚡ = 25



Fibreglass Driver Caps



Non-rusting, long life drive cap that fits over the top of a fibreglass post to prevent damage during installation
Set of 1x10mm and 1x13mm Driver Cap.




008479 Fibreglass Driver Caps 10+13mm  = 1

Tumble wheel (5)



One person can move a whole fence within a matter of minutes using the tumble wheels. The strip grazing system reduces the grazing cycles and increases the yield. Ask your dealer for more information.
Maximum fence height: 0.78m.



056388 Tumble wheel (5)  = 5

Quattro post



Very sturdy, lightweight spring steel post with 4 removable insulators. Maximum fence height 87.5cm. The 10cm double pointed foot makes it easy to install. White insulated coating for maximum visibility and to avoid shorting problems.



064253 White - 1.00m  = 10

067513 Insulator for 064253  = 10

Garden post / Pond Post



Compact, curved plastic post for mobile fences for deterring herons. Ideal for use near a pond. With curve as extra protection against animals leaning over and overhanging plants. For use in combination with plastic wire. Easy to fit. Maximum fence height: 51cm. Product warranty: 2 years.



065035 Garden post  = 5






CONDUCTING WIRES

The conducting wire in electric fencing is of crucial importance, because it transports the current. Even though all conducting wires would appear to be the same, there is a big difference in terms of price and quality. There are also differences in use. The Gallagher range consists of tape, cord, plastic wire, Equifence and High Tensile. Each of them with their different conductivity, durability and design. Make sure you choose the right conducting wire for your use!

EQUIFENCE

This is the most durable and safe Gallagher fencing for horses. EquiFence consists of an elastic plastic cable with a galvanised core. The 3mm thick plastic casing protects the horse against the zinc-aluminium core. The plastic casing has been made conductive by means of three carbon lines. Fitting a Gallagher EquiFence fencing requires experience, so please contact your Gallagher specialist.

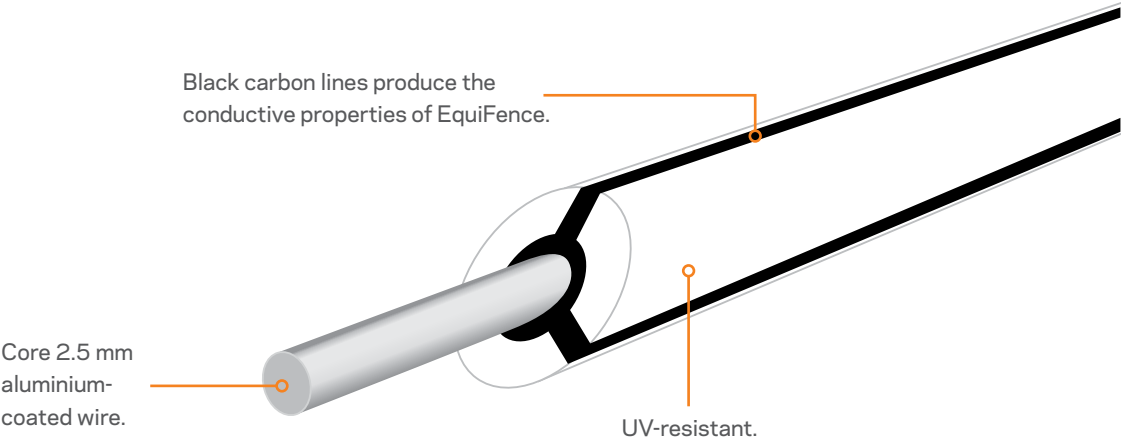

Equifence



The safest solution for your horse. Unique electrically conductive polymer (in black stripes) allows use as electric fence wire. Provides you, in combination with tension springs, ultimate safety for your horse. Total diameter of 7.5mm with a core of 2.5mm high tensile wire.



009124	White - 250m	☞ = 1
053858	Terra - 250m	☞ = 1



HIGH TENSILE

This aluminium-coated wire is many times better than any other steel wire. An aluminium coating on the 2.5mm thick core ensures superior conductivity of up to 15x more than a normal 2.5mm steel wire. The tensile strength of the wire is also particularly high at up to 500 kg. You can tension the wire very tightly and when used in combination with tension springs, you can work with a distance of 20m between posts. This produces considerable cost savings per metre.

ELECTROMAX 2.65MM

Particularly suitable for fencing that requires increased conductivity and control.

- 15% better conductivity than standard 2.5mm aluminium-coated wire
- Patented, advanced zinc-alu alloy coating produces superior corrosion resistance.



High conductive fence wire 2,65mm



15% more conductive than standard 2,5mm high tensile wire. Carries power further and handles shorts better. Patented zinc-alu alloy outer surface for up to 3 times longer life than standard high tensile wire.



069385 ø2,65mm, ca 600m

☞ = 1

H.T. zinc-alu wire



Steel cored, high tensile fence wire with an aluminium coating for longer life and greater conductivity. Permanent Wire Tensioner and Tension Springs can be used to strain the wire.



039999 ø2,5mm - ca.625m (25kg)

☞ = 1

077311 ø1,8mm - ca.1250m

☞ = 1

004188 ø1,6mm - ca.1580m (25kg)

☞ = 1

004195 ø1,6mm - ca.315m (5kg)

☞ = 1

M.T. fencing wire



Erecting a permanent fence becomes very simple with this aluminised fencing wire. Easier to bend than regular HT wire, but strong enough to keep sheep, cattle or game in/out. Very low resistance, which makes this wire ideal for long fence lines.



060412 ø1.8mm - ca.500m (10kg)

☞ = 1



Stranded wire



High conductive 7 strand galvanized wire for long portable fences which are affected by growth. To be used with rabbit, fox, pig, and sheep fences.



008759	ø2mm - 200m (3kg)	⚡ = 1
007806	ø2mm - 400m (6kg)	⚡ = 1

SPECIFICATIONS WIRE CONDUCTORS

	Item number	Colour	Metres on roll	Voltage at start of fencing	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	High tensile	Medium Tensile	Recommended Fencing length (m)	Special properties
H.T. zinc-alu wire 1,6mm	004195 004188		315m 1580m	8kV	7,5kV	7kV	0,07	220	•		500 >	zinc aluminium coating
M.T. zinc-alu wire 1,8mm	060412		500m	8kV	7,6kV	7,1kV	0,067	250		•	500 >	zinc aluminium coating
H.T. zinc-alu wire 1,8mm	077311		1250m	8kV	7,7kV	7,3kV	0,05	350	•		500 >	zinc aluminium coating
H.T. zinc-alu wire 2,5mm	039999		625m	8kV	7,8kV	7,5kV	0.035	500	•		500 >	zinc aluminium coating
High conductive fence wire 2,65mm	069385		600m	8kV	7,9kV	7,8kV	0,029	550	•		500 >	zinc aluminium coating
EquiFence 7,5mm	009124 053858	White Terra	250m 250m	8kV	7,7kV	7,5kV	0,035	500	•		< 500	2.5mm galvanised wire with non-conductive plastic casing and 3 conductive carbon cores.



CORD, PLASTIC WIRE AND TAPE

ECONOMYLINE AND POWERLINE

For fencing that is shorter than 500 metres. Available in Tape, Cord and Vidoflex 3 and 6. PowerLine conductors are made of durable top-quality plastic and stainless steel

EconomyLine ⚡

PowerLine ⚡

TURBOLINE

For fencing that is longer than 500 metres. Available in Tape, Cord and Vidoflex 9. With a Turboline conductor you are certain you have the absolute top in conductors.

TurboLine ⚡

TAPE - PORTABLE AND PERMANENT FENCING

Tape has reinforced edges. You recognise PowerLine tape by the black side wire. These properties guarantee a longer lifespan for the product. The TurboLine version can be recognised by the red side wire and has a 40x better conductivity because of the light-metal wires that have been incorporated in the conductor.

TurboStar ⚡⚡⚡

Extremely strong, super conductive tape for long, permanent equine fencing. Perfectly visible. The sturdy, conductive side wire in the edges provides extra strength. Power guaranteed from beginning to end due to excellent conductivity. The unique composition ensures 40x better conductivity than standard 40mm tape.

PLASTIC WIRE VIDOFLEX - PORTABLE FENCING

Vidoflex is ultralight and extremely durable. The 3, 6 and 9 next to the name Vidoflex note the number of current wires that have been incorporated for conductivity. The conductive wires of Vidoflex 9 TurboLine are made of a special alloy that is particularly conductive.

CORD, SOFT VERSION - PORTABLE AND PERMANENT FENCING

Cord is a conductive plastic wire suitable for fencing for cattle and horses. Available in a PowerLine or TurboLine version.

PowerLine rope Eco



PowerLine Rope for semi permanent fences, suitable for horses and cattle. With 5 stainless steel wires for high conductivity. UV stabilised. Post spacing up to 8m.

PowerLine rope



Braided PowerLine Rope for (semi) permanent fences, suitable for horses and cattle. With 5 stainless steel wires and 1 tinned copper wire for high conductivity. UV stabilised. Post spacing up to 8m.



063918	White - 100m	⚡ = 1
063925	White - 200m	⚡ = 1
063932	White - 500m	⚡ = 1
063949	Terra - 200m	⚡ = 1

063956	White - 200m	⚡ = 1
063963	Terra - 200m	⚡ = 1
072453	White - 500m	⚡ = 1
072460	Terra - 500m	⚡ = 1



TurboLine rope



Braided TurboLine Cord prevents a lot of stretching and ensures a long life. By using 3 tinned copper wires in combination with 8 stainless steel wires an optimal conductivity is realised. Soft-touch cord provides high safety for animals.



057856	White - 200m	☼ = 1
056101	Terra - 200m	☼ = 1
058006	White - 500m	☼ = 1
057993	Terra - 500m	☼ = 1

SPECIFICATIONS CORD

	Item number	Colour	Metres on roll	Voltage at start of fencing	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	Number of stainless steel conductors	Number of copper conductors	Recommended fencing length (m)
Economy Line Cord 5mm	063918	White	100m	8kV	2kV	1kV	3,82	330	5		< 500
	063925	White	200m								
	063932	White	500m								
	063949	Terra	200m								
PowerLine Cord 5+mm	063956	White	200m	8kV	4,5kV	2,5kV	0,18	330	5	1	< 500
	072453	White	500m								
	063963	Terra	200m								
	072460	Terra	500m								
TurboLine Cord 6+mm	057856	White	200m	8kV	7,5kV	7kV	0,06	430	8	3	500 >
	058006	White	500m								
	069293	White	2x200m								
	069798	White	2x500m								
	056101	Terra	200m								
	057993	Terra	500m								
	069309	Terra	2x200m								
	069804	Terra	2x500m								

Blue Polywire - 400m



Blue polywire specially developed to keep wild animals out, in specific wild boars. Studies show that wild boars have poor eyesight and primarily see the color blue. Keep your crops safe by using this highly conductible wire.




075829	Blue Polywire - 400m	☼ = 1
072477	Blue Polywire - 1000m	☼ = 1

Vidoflex 9 TurboLine Plus



52% stronger than traditional polywire. Will not twist or kink when winding onto reels. Ideal for long portable fences, the patented mixed metal conductive wires carry the pulse 40 times better than standard PowerLine wire. Always use TurboLine products if fence > 500m.

011247	White - 200m	☞ = 1
011254	White - 400m	☞ = 1
054862	Terra - 400m	☞ = 1
049028	White - 1000m	☞ = 1
075775	Terra - 1000m	☞ = 1

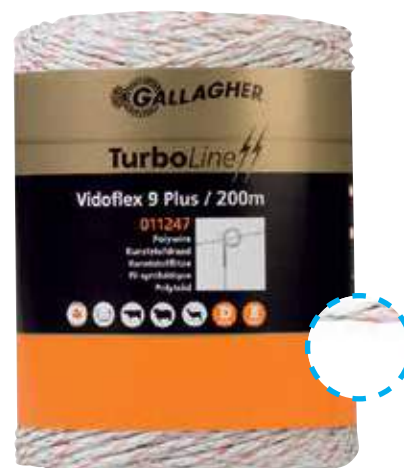

Vidoflex 3



Polywire with 6 Stainless Steel wires. Suitable for short portable fences. Available in 100m (brown) and 200m (white).



063987	Terra - 100m	☞ = 1
019335	Green - 100m	☞ = 1
010554	White - 200m	☞ = 1

Vidoflex 6



Thick polywire with 6 stainless steel wires providing excellent conductivity. Ideal for portable fences. UV stabilised and high tensile strength for longer life.



021680	White - 200m	☞ = 1
063970	Terra - 200m	☞ = 1
021697	White - 400m	☞ = 1
054855	Terra - 400m	☞ = 1
072422	White - 1000m	☞ = 1

SPECIFICATIONS VIDOFLEX

	Item number	Colour	Metres on roll	Voltage at start of fence	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	Number of stainless steel conductors	Number of copper conductors	Recommended fencing length (m)
PowerLine Vidoflex 3 2mm	010554 063987 019335	White Terra Green	200m 100m 100m	8kV	1,1kV	0,6kV	6,8	47	6		< 500
PowerLine Vidoflex 6 2.5mm	021680 021697 072422 063970 054855	White White White Terra Terra	200m 400m 1000m 200m 400m	8kV	2,3kV	1,4kV	3,8	80	6		< 500
TurboLine Vidoflex 9 3mm	011247 011254 049028 069316 069323 054862 075775	White White White White White Terra Terra	200m 400m 1000m 2x200m 2x400m 400m 1000m	8kV	7kV	6,4kV	0,06	105	6	3	500 >
TurboLine Blue Polywire 3mm	075829 072477	Blue Blue	400m 1000m	8kV	7kV	6,4kV	0,06	105		3	500 >



PowerLine tape 40mm - 200m



Highly visible tape with black reinforced edges. 11 thick stainless steel wires and 1 mixed metal wire for excellent conductivity.



006246	White - 200m	☞ = 1
060696	Terra - 200m	☞ = 1

PowerLine tape 20mm



Clearly visible PowerLine Tape with black reinforced edges. Ideal for semi-portable horse fencing. 5 thick stainless steel wires and 1 mixed metal wire for good conductivity. Post spacing up to 5m.



106236	White - 200m	☞ = 1
--------	--------------	-------

PowerLine tape 12,5mm



Strong, 12.5mm PowerLine Tape with 4 thick stainless steel wires and 1 mixed metal wire for good conductivity. Suitable for portable fences for cattle, young stock and horses. Post spacing up to 5m.



062303	White - 100m	☞ = 1
026237	White - 200m	☞ = 1

TurboLine tape 40mm



Very strong TurboLine Tape with reinforced red edges, intended for permanent fencing for horses. 40 times better conductivity than standard 40mm PowerLine Tape. With 11 stainless steel wires 0,16mm and 4 mixed metal wires 0,25mm. Post spacing up to 6m.



007592	White - 200m	☞ = 1
--------	--------------	-------

TurboLine tape 20 mm



Very strong TurboLine Tape with reinforced red edges, suitable for semi-permanent horse fencing. Blends in with the surroundings so it is not so conspicuous. 40 times more conductive than standard Powerline tape. Post spacing up to 6m. Always use TurboLine products if fence > 500m.



007608	White - 200m	☞ = 1
060702	Terra - 200m	☞ = 1

TurboLine tape 12,5mm



12,5mm TurboLine Tape. The horizontal wires are interconnected at 13 cm intervals ensuring better conductivity. 40 times more conductive than standard polytape. Ideal for portable electric fences. Post spacing up to 5m. 200m and 400m rolls. Always use TurboLine tape if fence > 500m.



076232	White - 200m	☞ = 1
086231	White - 400m	☞ = 1

TurboStar tape 40mm white 100m



TurboStar Tape is a premium 40mm tape which has the lowest resistance available today. It has 40 times better conduction than regular tape and will result in more power on your fence due to 10 stainless steel wires and 4 mixed metal wires. Post spacing up to 6m. The sturdy and breathable features prevent tensioning regularly. Available in white and terra on 100m rolls.

072439	White - 100m	☞ = 1
072446	Terra - 100m	☞ = 1
010608	White - 200m	☞ = 1
010615	Terra - 200m	☞ = 1
010516	Green - 200m	☞ = 1



TurboStar tape 40mm white 350m



TurboStar Tape is a premium 40mm tape which has the lowest resistance available today. It has 40 times better conduction than regular tape and will result in more power on your fence due to 10 stainless steel wires and 4 mixed metal wires. Post spacing up to 6m. The sturdy and breathable features prevent tensioning regularly. Available in green, terra and white on 200m rolls and white and terra on 350m rolls.



070862	White - 350m	☞ = 1
070879	Terra - 350m	☞ = 1

SPECIFICATIONS TAPE

	Item number	Colour	Metres on roll	Voltage at start of fence	500 metres	1000 metres	Resistance (Ohm/metre)	Tensile strength (kg)	Number of stainless steel conductors	Number of copper conductors	Reinforced side wire	Vertical linking	Recommended fencing length (m)
PowerLine Tape 12.5mm	062303 026237	White White	100m 200m	8kV	4,5kV	2,5kV	0,18	65	4	1			< 500
PowerLine Tape 20mm	106236	White	200m	8kV	4,5kV	2,5kV	0,18	175	5	1	▪		< 500
PowerLine Tape 40mm	006246 060696	White Terra	200m 200m	8kV	4,4kV	2,3kV	0,17	450	11	1	▪		< 500
TurboLine Tape 12.5mm	076232 086231	White White	200m 400m	8kV	6,4kV	5,3kV	0,09	100	3	2	▪	▪	500 >
TurboLine Tape 20mm	007608 060702	White Terra	200m 200m	8kV	6,4kV	5,3kV	0,09	200	3	2	▪	▪	500 >
TurboLine Tape 40mm standard	007592	White	200m	8kV	7,5kV	7kV	0,05	380	11	4	▪	▪	500 >
TurboStar Tape 40mm super	072439 010608 070862 072446 010615 070879 010516	White White White Terra Terra Terra Green	100m 200m 350m 100m 200m 350m 200m	8kV	7,5kV	7kV	0,04	520	10	4	▪		500 >




INSULATORS

With our range of insulators we provide a solution for every type of fencing. Whether you use tape, cord, plastic wire, EquiFence or aluminium-coated wire, Gallagher has it all. Our insulators stand out in terms of price, quality and durability.

XDI screw-in insulator



Improved screw-in insulator with unique advantages over traditional black screwing insulators. Much stronger due to the new technology.

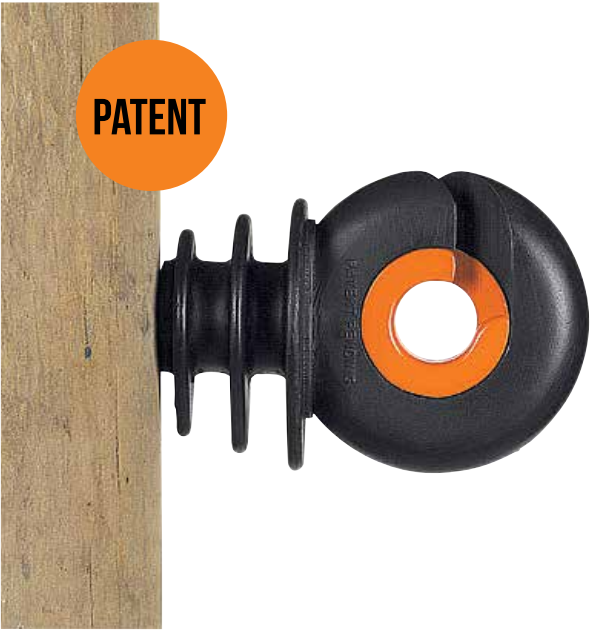

025510	XDI screw-in insulator	☞ = 25
065059	XDI screw-in insulator	☞ = 75
025527	XDI screw-in insulator	☞ = 125
060788	XDI screw-in insulator	☞ = 250

XDI bolt-on insulator



High quality Bolt-on insulator with metal core. The orange ring guarantees an equal distance between the insulator and the conductor. Suitable for (poly) wire or cord on a steel post, like the Termination post (022014/022236). (External thread length 25mm M6 incl. 2xnut, total length 33mm).



057795	XDI bolt-on - M6x23mm	☞ = 10
--------	-----------------------	--------

Screw-in Insulator PROMOPACK (100)



With metal core. High-quality black plastic. For wooden posts. Suitable for (poly) wire and cord.

PROMO PACK **EVEN MORE ECONOMICAL**



071074	Screw-in Insulator	☞ = 100
--------	--------------------	---------



Screw-in insulator



Low-priced, high quality screw-in insulator without metal core. Suitable for wooden posts.

060894 Screw-in insulator Economy = 75

Wire clip for Line Post



You need this wire clip if you want to fit fencing wire or cord of up to 8mm (Gallagher EquiFence/permanent cable) to a Line Post. These clips have been developed especially for the Gallagher Line Post.

NEW

744346 Wire clip for Line Post (8mm) (20) = 20

Claw Insulator



Insulator for permanent fencing with flat back for stable fitting on a concrete post. Suitable for HT wire and Vidoflex.




709048 For concrete post (25) = 25

Screw-in insulator



Solid High quality screw-in insulator without metal core, therefore no short circuiting possible. For adding a wire to a wooden fence post.

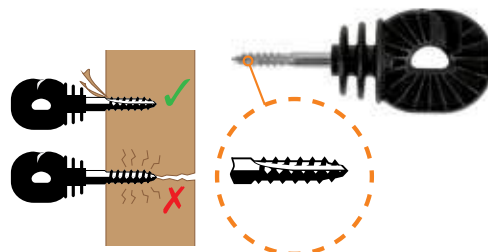

004089	Small	$\frac{\pi}{8} = 25$
040711	Small	$\frac{\pi}{8} = 125$
011193	Small	$\frac{\pi}{8} = 250$
009008	Super	$\frac{\pi}{8} = 25$
040728	Super	$\frac{\pi}{8} = 100$
011209	Super	$\frac{\pi}{8} = 250$

Wooden post “W” insulator



Made from high density, sunlight resistant polyethylene plastic. Large heavy duty shield eliminates power leakage. Suitable for guiding wire around a corner post.



006734	Black	= 25
028498	Black	= 175

Wooden post "W" super insulator



Made from high density, sunlight resistant polyethylene plastic. Large heavy duty shield eliminates power leakage. Suitable for guiding wire around a corner post.



067612	White	$\frac{1}{2}$ = 25
067617	White	$\frac{1}{2}$ = 175
067605	Black	$\frac{1}{2}$ = 25
021055	Black	$\frac{1}{2}$ = 175

Strain insulator



Suitable for short strains and semi-permanent short fences. Available in plastic and super strong polycarbonate



011025	Black	= 5
012015	Black	= 100



Strain insulator reinforced



Suitable for short strains and semi-permanent short fences. Available in plastic and super strong polycarbonate.



011032	White	⚡ = 5
678023	Black	⚡ = 5
012022	White	⚡ = 100
678061	Black	⚡ = 100

Porcelain insulator



A porcelain End-strain Insulator for high tensions.



015139	White	⚡ = 6
053506	White	⚡ = 60

Porcelain insulator



A porcelain roll-corner insulator to strain the wires on the corner posts.



015146	White	⚡ = 6
015141	White	⚡ = 60

Roller screw-in insulator



Innovative Gallagher design. Easy to install. Suitable for poly wire and rope. The special design means the wire always returns to the roll.




029013	Roller screw-in insulator	⚡ = 5
--------	---------------------------	-------

Clip



We recommend the use of Part.No 011056 for fixing wire to an Insultimber post or Gallagher Ecopost. Use Part.No 011063 with 1 metre droppers. You can tighten the clips using the wire twister (part.no 005232).

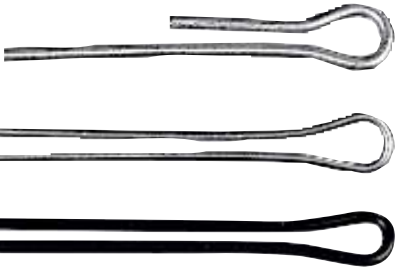

997025	Plastic coated	⚡ = 50
011056	Short	⚡ = 25
024698	Short	⚡ = 1000
011063	Long	⚡ = 50
024704	Long	⚡ = 1000

Roller insulator



For use with Termination post (022014/022236) or for fixing to a wooden fence post. Only suitable for poly wire.



010707	Roller insulator	⚡ = 5
--------	------------------	-------

Roller bolt-on insulator



For use with Termination post (022014/022236). Only suitable for poly wire. External thread length 28mm. M8 incl. 2 x nut.



010714	Bolt-on - M8	⚡ = 5
--------	--------------	-------

PowerLine tape insulator



Insulator used to fix 40mm tape to wooden fence post. Can be stapled, nailed or screwed to post. The tape is very easy to fix.




011094	PowerLine tape insulator	⚡ = 25
040674	PowerLine tape insulator	⚡ = 125



TurboLine horse insulator



Insulator with soft faces to lock the tape between two rubber sleeves (patented system). Fixes the tape with 1 click and prevents wearing guaranteeing a long life for your tape. Additional screw can be used to tighten the insulator even more.

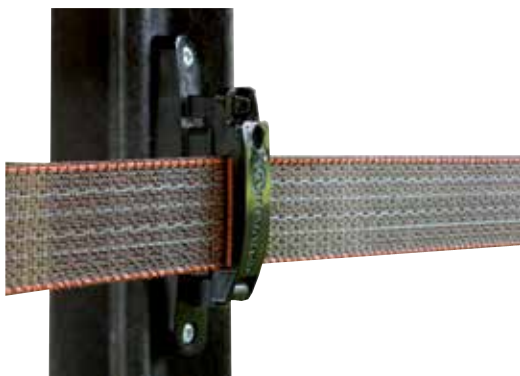

699004	TurboLine horse insulator	☞ = 20
699066	TurboLine horse insulator	☞ = 100

TurboLine horse corner/strain insulator



The new very innovative robust Corner Insulator. Has a lot of advantages compared to the traditional insulators. A unique sub frame for optimal strength and fixation at the post. Pre mounted rubber grip for best tape fixation. Can be installed with only one drill bit. A unique slot to strain and re-strain your tape. The optional metal plate (art. 708027) can be used as a tape connector and gate anchor.



701028	TurboLine corner/strain insulator	☞ = 5
701042	TurboLine corner/strain insulator	☞ = 30
708027	Plate for 701028/701042	☞ = 5

TurboLine tape insulator



Insulator with soft faces to lock the tape between two rubber sleeves (patented system) to prevent the wear off guaranteeing a long life for your tape.



011087	TurboLine tape insulator	☞ = 20
021482	TurboLine tape insulator	☞ = 100

TurboLine corner/strain insulator



Corner insulator in high quality plastic which secures the tape between 2 rubber sleeves (patented system), guaranteeing long life for your tape. Use the connecting plate (Part No. 010745) for end (gate) posts to ensure good connection between the tapes.



016702	TurboLine corner/strain insulator	☞ = 5
043880	TurboLine corner/strain insulator	☞ = 30
010745	Tape joiner 20/40mm	☞ = 5

TurboLine Tape clip



Fast install, easy to use no tools required. Positive locking and quick release to enable re-tensioning of tape. Soft rubber pads lock tape in place to prevent tape movement and fraying.

NEW



747033	For Gallagher LinePost (40mm) (12)	☞ = 12
---------------	------------------------------------	--------

XDI offset bolt-on insulator 20cm / M6



Innovative Gallagher design. Much stronger than the standard offset insulator due to a new technique, and more durable due to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. (Total length 200mm, external thread length 125mm M6 incl. 2xnut/washer).



029006	XDI offset Bolt-on (M6) - 20cm	☞ = 10
---------------	--------------------------------	--------

XDI offset screw-in insulator 10cm



Innovative design. Much stronger than the standard offset screw-in insulator thanks to a new technique. More durable thanks to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. To be used with wooden posts. Distance 18cm.



NEW

075904	XDI offset screw-in insulator - 10cm	☞ = 20
077274	XDI offset screw-in insulator - 10cm	☞ = 100



XDI offset screw-in insulator 18cm



Innovative design. Much stronger than the standard offset screw-in insulator thanks to a new technique. More durable thanks to its metal core. The chance of short-circuits is zero. The orange plastic section serves as a wear indicator. To be used with wooden posts. Distance 18cm.



028993	XDI offset screw-in insulator - 18cm	☞ = 10
042647	XDI - 18cm	☞ = 100

XDI offset insulator 18cm



High quality offset insulator (18cm) with metal core, helps prevent damage to non-electric fences. The orange ring guarantees an equal distance between the insulator and the conductor. Suitable for (poly) wire or cord.



057801	XDI offset insulator - 18cm	☞ = 10
057818	XDI offset insulator - 18cm	☞ = 100

Offset insulator 10cm (20)



Solid high quality offset screw-in insulator (10cm) for wooden posts. Without metal core. Suitable for (poly) wire and cord.



072491	Offset insulator 10cm	☞ = 20
--------	-----------------------	--------

Wire Insulator



This insulator has been developed especially for fitting on a spacer insulator (item 072491 or 029006). With this combination you can quickly and easily create a plus-minus fencing on your fence to keep cats out or in your garden.



077335	For pos/neg Fence System	☞ = 30
--------	--------------------------	--------

Offset screw-in insulator 20cm



For electrifying non-electric fences quickly and effectively. Distance 20cm. With insulator suitable for wire and rope up to 9mm.




009350	Wood - 20cm	☞ = 10
--------	-------------	--------

Offset bolt-on insulator 20cm / M6



For electrifying non-electric fences quickly and effectively. Distance 20cm. With insulator suitable for wire and rope up to 9mm. To be used with steel posts. (External thread length 110mm M6 incl. 2xnut).

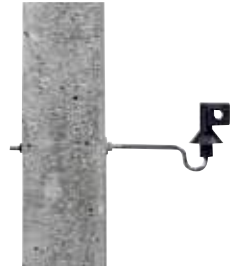

007516	Bolt-on (M6) - 20cm	☞ = 10
--------	---------------------	--------

Pigtail offset



For electrifying specific existing non-live fences quickly. Available in 2 lengths: 17.5cm or 40cm. Very suitable for rope and tape. Pre-drill hole and staple the offset to the wooden post.



010981	White - 17.5cm	☞ = 10
720234	Terra - 17.5cm	☞ = 10
010998	White - 40cm	☞ = 10
720135	Terra - 40cm	☞ = 10

Steel post Live Tip Lockset Offset (16cm, pack of 20)



With an electrified tip and zero leakage through the post, the live tip offsets are an effective, new option for protecting existing fences. 10 year product warranty.


Wood post Live tip Offset 16cm



With an electrified tip and zero leakage through the post, the live tip offsets are an effective, new option for protecting existing fences. 10 year product warranty.



006183	16cm	☞ = 20
006190	26cm	☞ = 20

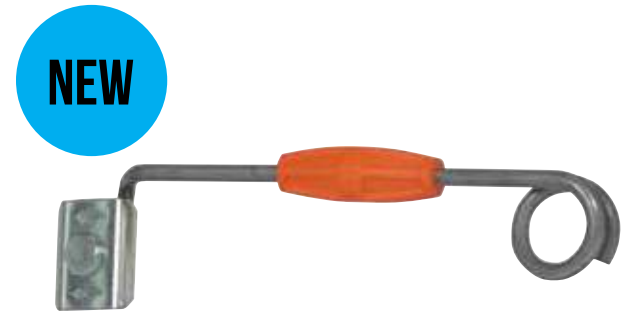


006145	16cm (20)	☞ = 20
--------	-----------	--------



Offset insulator



For protecting and electrifying chain link netting. The completely galvanized clips are easy to fit to any type of netting. Pin lock insulator makes fixing the wire easy. 32cm long.



010912 Chain link - 32cm

☞ = 25

Offset Pinlock Insulator 30cm Black



For electrifying existing or run down fences. Easy to fix. 30cm long. Large spark guard. Pin lock for easy installation and removal of wires.



659046 Offset Pinlock Insulator

☞ = 25

Mounting bracket



Mounting bracket. Fits on every garden wire enclosure. Incl. a connection point (M6 and M8) for insulator 010714/057795/007516 to also protect your garden wire enclosure. Fitted with a rubber insert to prevent damage to the post.



008780 Mounting bracket ø40-60mm

☞ = 5

Clip



Easy to use stainless steel clips for adding an extra wire to the Gallagher Fibre glass post ø10mm.



018300 Clip fibreglass post ø10mm

☞ = 25

Screw-on rod insulator (20)



For adding extra wire to round portable posts. Ideal for steel pigtail posts.



010950 Screw-on rod Black ø4-10mm

☞ = 20

010936 Screw-on rod Green ø6-14mm

☞ = 20

011230 Screw-on rod Green ø6-14mm

☞ = 250

010943 Screw-on rod White ø6-16mm

☞ = 10

Insulator for metal orange post



Adjustable insulator for Spring steel Post (art. 008902/019274).



010752 Insulator for 008902/019274

☞ = 10

Clips stainless steel



Easy to use stainless steel clips for adding an extra wire to the Gallagher pvc post 13mm.



003266 Clips for PVC post 13mm

☞ = 10

063499 Clips for PVC post 19mm

☞ = 25





CONNECTORS

Connectors are crucial in electric fencing. They are relatively small parts, but essential to proper current conductivity. Knotting wire together produces a loss of power, rendering the fencing ineffective. Fitting a good connector represents a minor investment, but you do have perfect fencing!

Vidoflex connector (4)



This stainless steel clamp provides a good conductive connection between polywire. Easy to use.



060764 Vidoflex connector ⚡ = 4

Cord connector with wingnut



This stainless steel clamp provides a good conductive connection between Rope or Vidoflex.



075928 Cord connector with wingnut ⚡ = 4

Connectors



This stainless steel clamp provides a good conductive connection between Rope or Vidoflex.




019342 Rope connector ⚡ = 4

071159 Rope connector ⚡ = 25

Joint clamp



Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wire and rope.



010851 Bobbin ⚡ = 10

603568 Bobbin ⚡ = 100

Joint clamp angle



Essential for ensuring there is no loss of conductivity at connections. Effective animal control is dependant on optimum conductivity around the power fence. Heavily galvanized for durability and long life. Suitable for all size wire and rope.



010868 Wing nut ⚡ = 10

603964 Wing nut ⚡ = 100

060498 Hex nut ⚡ = 100

Tape joiner



Innovative Gallagher design. For connecting and tensioning tape up to 20mm. Easy to install using the rucksack clasp principle. Now it is easy to connect tension and release tape.




028979 Tape joiner 12,5/20mm ⚡ = 5

028962 Tape joiner 20/40mm ⚡ = 5

Tape joiner



To be used in combination with part no. 016702 or for joining and/or connect 20/40mm tape. Gives excellent mechanical and electrical connection. Made from non-rusting stainless steel.




010745 Tape joiner 20/40mm

☞ = 5

Tape connectors



Double connector for connecting two rows of tape. Length cable: 60cm.

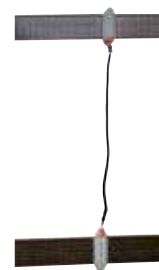

055333 Tape connectors - 60cm

☞ = 1

Tape energizer connector



Single connector for perfect connection from the energizer to the tape fence line. Length cable: 130cm.



055340 Tape energizer connector - 130cm

☞ = 1

End strain kit



Kit to easily tension Equiwire or High Tensile using a socket, fork spanner or a tensioner (695303). Eliminates the need for wire knots. May be used on all Gallagher wooden posts. Includes 2 tensioners.



618005 End strain kit

☞ = 2

695303 Handle for tensioner 618005/056095

☞ = 1

Clip lock strainer



Clip lock strainers can be placed in the fence line during or after building your fence. For easy straining and re-straining your wires.



056095 Clip lock strainer

☞ = 2

695303 Handle for tensioner 618005/056095

☞ = 1

Rope tensioner



For easy tensioning of rope. Easy release thumb catch. For use in combination with the roller screw-in insulator. (# 029013) or the strain insulator (# 011025/011032). Comes as standard with a roller screw-in insulator.



028955 Rope tensioner

☞ = 1

Tension spring



The tension spring neutralises the tension difference in the wire which is caused by fluctuations in temperature. It keeps the wire evenly tensioned during summer and winter, which means you can double (up to 15m) the distance between the posts. Suitable for 1.6mm and 1.8mm HT wire. Maximum tension strength 85kg. Stainless steel, length spring 155mm, Productwarranty 10 Year.



004133 For H.T. ø1,6mm/1,8mm

☞ = 1

Tension spring



The tension spring neutralises the tension difference in the wire which is caused by fluctuations in temperature. It keeps the wire evenly tensioned during summer and winter, which means you can double (up to 15m) the distance between the posts. Suitable for 2.5mm and 2.65mm HT wire and EquiFence. Maximum tension strength 200kg. Stainless steel, length spring 345mm, Productwarranty 10 Year.



036257 For HT/EQ ø2,5mm/2,65mm

☞ = 1

Wire tensioner



Use of this unique tensioner means that the wire does not have to be cut to strain it. Consequently, the power in the wire will be uninterrupted. Strong, lightweight, rust resistant construction. Can be used to join wires. Also suitable for rope. Excl. Wiretensioner (029044 or 006451).

010882 Wire tensioner

☞ = 3

021475 Wire tensioner

☞ = 25





GATES


Gallagher has several options for making a gate. Are you familiar with the Gallagher multi-wire gate set? They are ideal! It allows you to open and close the gate with one hand.

We also have a tough electric gate for permanent fencing.

Multi strand gate kit



The most complete and easy to use all-in-one multi strain electric gate on the market. Provides a low cost gate solution for practically any width gateway. Comes with 40mm tape.

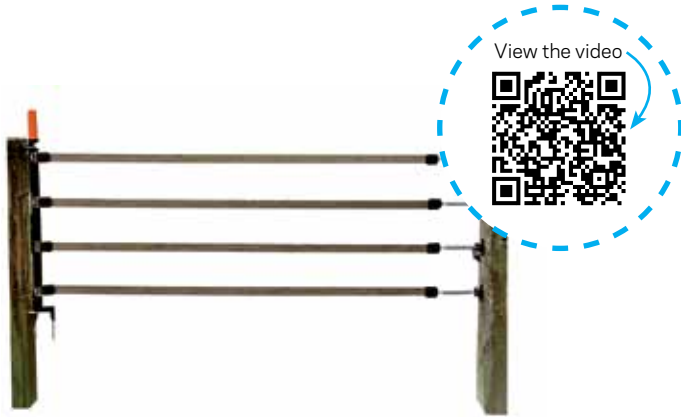

718842	4 x 40mm tape terra - 6m	⚡ = 1
718040	4 x 12,5mm tape white - 6m	⚡ = 1
718026	2 x 12,5mm tape white - 8m	⚡ = 1

Electrified steel gate



Adjustable, maintenance free gate, fully electrified. Suitable for all permanent fences incl. tape. Will fit gates from 2.5m to 4.5m. Height: 1.0m.



001064	Gate - 2.5m-4.5m	⚡ = 1
--------	------------------	-------

Drive thru Electro gate



A complete gate which can be erected anywhere where you have to drive frequently through a gate. Vehicles can push the gate open and the spring loaded gate closes automatically.



004164	Drive thru Electro gate 3.7m	⚡ = 1
054923	Drive Thru Electrogate 5.0m	⚡ = 1

Gate Release Timer



Automatic gate opener, including self-closing gate spring. This system is ideal for opening a gate at a pre-set time. Extremely suitable for dairy farming and strip grazing. The system works on a battery with support from solar panels, ensuring the battery lasts longer.




077441	Gate Release Timer	⚡ = 1
--------	--------------------	-------



016412
Elastic rope gate



640556
Elastic rope gate

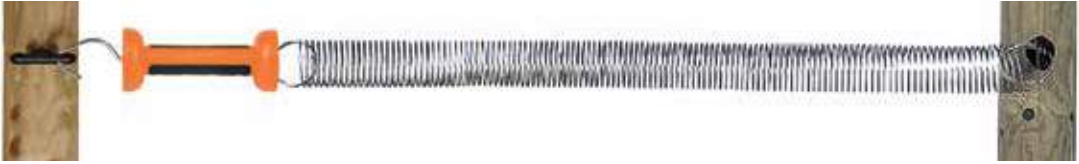

009084
Spring gate



016405
Spring gate white



054954
Retractable auto reel terra



010844
Retractable auto reel white

Elastic rope gate



Complete gate set (conductive cord, white), to quickly and easily create a passage in a (cord) fence. Easy to open and close by pick up the gate handle in or out of the included gate handle anchor. Suitable for gate passages starting from 3 up to 6 meters wide.

Elastic rope gate



Set to create a gate using elastic conductive rope (white). This rope with a length of 6½m can be stretched to create a gate of up to 11m. Fence can be opened from either end. Includes 2 gate handles attached to the elastic rope and 2 unique Gallagher gatehandle anchors.



016412 Rope gate set white ⚙️ = 1
072354 Rope gate set Terra ⚙️ = 1



640556 Rope gate set ⚙️ = 1



Spring gate



Adaptable, gate closure. Complete set, maximum width 5 m. Not recommended for use with horses.



009084	Spring gate	☞ = 1
016405	Spring gate white	☞ = 1

Retractable auto reel



Gate system with retractable reel, it automatically rolls and unrolls a walk way up to 15m. Simple to install and easy to handle. Comes complete with gate handle and multi directional mounting bracket. Available in white and terra.



010844	White - 15m	☞ = 1
054954	Terra - 15m	☞ = 1

Soft touch gate handle Rope/Wire



New strong gate handle in orange with black rubber accents for an optimal grip and excellent visibility. 697000 for cord or wire, 696003 with tape buckle 40mm.



697000	Orange - rope/wire	☞ = 1
055722	Orange - rope/wire (4)	☞ = 4
057979	Terra - rope/wire	☞ = 1
058198	Terra - rope/wire (4)	☞ = 4

Soft touch gate handle Tape



New strong gate handle in orange with black rubber accents for an optimal grip and excellent visibility. 697000 for cord or wire, 696003 with tape buckle 40mm.



696003	Orange - tape	☞ = 1
055715	Orange - tape (4)	☞ = 4
057986	Terra - tape	☞ = 1
058204	Terra - tape (4)	☞ = 4

Orange gate handle



Heavy duty, durable gate handles in black and orange. Good visibility and large protective shields. 007585 has a compression hook for easy use. 010769 for attaching tape to a gate handle.

010776	Gate handle orange	☞ = 1
010783	Gate handle black	☞ = 1
007585	Black - N	☞ = 1
010769	Gate break joiner	☞ = 4





Compression gate handle Black



Gate handle with compression hook for easy use.

PROMO PACK **EVEN MORE ECONOMICAL**



072408 Black

☞ = 10

Gate handle anchor



For connecting a gate handle, with galvanized joining plate. We recommend the use of wire clamp (part no. 010851) to guarantee an optimum connection.



010905 Gate handle anchor

☞ = 4

Gate handle anchor



Gate anchor with 3 anchor points for Gallagher gate handles, ideal in multi-paddock situations. Power connects to bolt from below the plate. Comes with the 3mm galvanized plate.



021451 3-way gate anchor

☞ = 4

Gate handle anchor



Innovative Gallagher design. For attaching a gate handle. Stronger than all other gate handle anchors thanks to the new technique. Made of high-quality materials. Includes connector option for 1,6mm earth cable.



028986 Gate handle anchor

☞ = 5

Gate handle anchor



Innovative Gallagher design. Anchor to attach a gate handle to steel posts. Stronger than all other gate handle anchors thanks to the new technique. Made of high quality materials.



060658 Bolt on - M6

☞ = 5

Gate handle anchor



For connecting a gate handle.



010738 Gate handle anchor

☞ = 4





REELS AND TOOLS

Reels are used for portable fencing to wind or unwind the fencing wire. It can be fixed with the reel corner post to produce a strong construction.

If you are going to put up electric fencing you simply need the right tools. Whether you need to tension High Tensile fencing, cut wire, or screw down insulators, the job is simple when you use Gallagher tools.

Reel 200m



Low cost convenient plastic reel with ratchet for 200 metres of polywire.



008933 Reel 200m = 1

Reel 400m



Convenient plastic reel with ratchet for 400 metres of polywire. Detachable drum.



008919 Reel 400m = 1

009145 Spare drum for reel 400m = 1

Econoreel 500m



A strong and durable reel with ratchet mechanism for winding up and unwinding polywire. Suitable for up to 500m polywire. Equipped with insulated handle. Hooks directly to fence or use Reel Stand.



046167 Econoreel 500m = 1

Geared reel 500m



Equipped with an accelerator mechanism so the drum rotates three times faster than standard reels. Carry handle with knuckle guard. Locking ratchet. Long crank arm for better leverage. Wire loop for connecting power to wire/tape. Holds up to 500 metres of polywire or 250 metres of tape. Attachable to Reel Stand.



061139 Geared reel 500m = 1

061115 Medium reel 500m = 1

SPECIFICATIONS REELS

	Vidoflex 9 TurboLine Plus	Vidoflex 6	Vidoflex 3	Cord	TurboLine tape 40mm	TurboLine tape 20mm	TurboLine tape 12.5mm
Reel 500m 061139	400m	500m	500m	200m	100m	150m	200m
Reel 500m 061115	400m	500m	500m	200m	100m	150m	200m
Econo reel 046167	400m	400m	500m	150m	100m	100m	150m
Reel 400m 008919	250m	400m	400m	-	-	-	-
Reel 200m 008933	150-200m	200m	200m	-	-	-	-
Reel 1200m 016313	1000-1100m	1200m	1200m	400m	200m	200m	400m



Large geared reel 1200m



Heavy duty gearbox for easy winding, fast wind in (2.7:1). Large comfortable hand grip with knuckle guard for safer use. Holds: 400m 12.5mm TurboLine tape, 400m 12,5mm PowerLine tape, 1000m TurboLine rope or 1200m Vidoflex 6.



016313 Large geared reel 1200m = 1

Triple Geared Reel Stand pre-installed



Triple Geared Reel Stand with 400m Vidoflex polywire. Pre-assembled with post and three pre-wound Geared Reels (061139).

Post height 1070mm and reels are pre-wound with 400m Vidoflex polywire. Suitable for containing all types of animals




633046 Incl. 3 Geared reel and TurboLine rope = 1

Reel/termination post



Reel/Termination post for portable fences. Holds up to three grazing reels or insulators. Galvanized steel Tread-in foot peg. Add the support bracket for additional structural support.

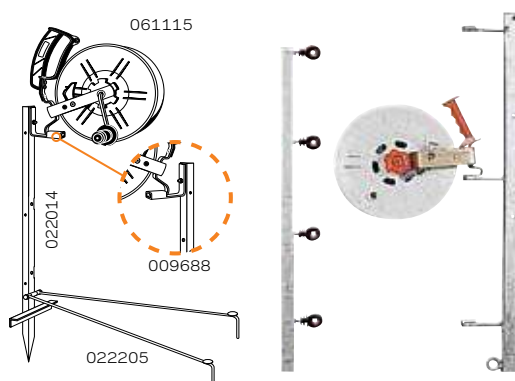

022014 3 reels/3 insulators - 1.25m = 1
022236 4 reels/4 insulators - 1.85m = 1
009688 Steel post reel connector = 4
022205 Support bracket = 1

Multi reel connector



Insulated lead for connecting power to multi reel system. UV resistant insulated plastic clips. Stainless steel jaws for long life.



006345 Multi reel connector = 1

Wire dispenser



Ideal for running out or winding up all types of wire. Fully galvanized for long life. Easy to use.



011018 Wire dispenser = 1

Gallagher pliers



Gallagher pliers: These pliers are suitable for all types of fencing wire. High quality and durable. Minimum wire damage. Cuts high tensile wire.



005225 Gallagher pliers = 1

Wire twister



With this wire twister, you can twist the wire clips around a wire without a problem. Ideal for use with Insultimber/ Ecopost fences.



005232 Wire twister = 1



Farmer pliers



Farmer pliers: indispensable fence pliers for cutting wire or removing staples. Can also be used as a hammer.



004140	Farmer pliers	🔧 = 1
--------	---------------	-------

Post holer



Low cost and easy to use tool for installing soft wood posts. Using the postholer makes fencing easy and prevents the post from getting damaged when using a sledge hammer. Two diameters.



704644	ø7.5cm	🔧 = 1
704668	ø10cm	🔧 = 1

Drill chuck for insulators Universal



Support to easy mount almost the entire range of Gallagher ring and screw insulators with your battery drill. (Not suitable for 057801, 057818 and 009350)



077397	Drill chuck for insulators Universal	🔧 = 1
--------	--------------------------------------	-------

Drill chuck Basic



Support to easy mount almost the entire range of Gallagher ring and screw insulators with your battery drill. (Not suitable for 057801, 057818, 009350 and Screw-in Insulator Super)



053933	Drill chuck Basic	🔧 = 1
--------	-------------------	-------

Rammer



Indispensable for driving Insultimber posts to correct depths without damaging posts. Prevents posts from standing out of line.



035311	Insultimber rammer	🔧 = 1
017652	Eco post rammer	🔧 = 1
017614	Sledge hammer	🔧 = 1

Rammer Line Post



Special rammer for convenient hammering in of a Gallagher Line post.



525013	Rammer Line Post	🔧 = 1
530031	Sleeve for Line Post rammer	🔧 = 1
540016	Line Post Pilot	🔧 = 1

Line Post Lifter Adapter



Line Post Post lifter to easily pull out the Gallagher Line Post. Handy tool designed specifically for the Gallagher Line Post.



527017	Line Post Adapter	🔧 = 1
--------	-------------------	-------

Universal Post Lifter



Post Lifter, suitable for the Line Post lifter adapter To easily pull out the Gallagher Line Post.



527000	Universal Post Lifter	🔧 = 1
--------	-----------------------	-------

Wire tensioner



Tool for installing ratchet tensioners in fencing.



029044	Wire tensioner	🔧 = 1
006451	Wire tensioner handle super	🔧 = 1

Screws

Self drilling torx screws with cylinder head. The special red wax layer makes pre-drilling unnecessary. Screw bit included.



050000	Gallagher screws	🔧 = 200
--------	------------------	---------

NETTING

Gallagher has wide range of netting for ideal and reliable portable/moveable fencing. Whether you need netting for sheep, chickens, rabbits, cats, dogs or goats, we've got it.

We would also like to introduce you to our ideal fencing for sheep and cattle. The SmartFence 2.0 is our pride and joy - the perfect alternative to standard fencing netting.

NETTING KEY

We have a wide range of netting. Please use the key to find the right netting for you. It enables you to find the specifications of the netting.

For example:

Sheep netting, Orange 90/1 W 14/G - 50m

①

②

③

④

⑤

⑥

⑦

⑧

1. the type of netting
2. the colour of the netting
3. the height of the netting (cm)
4. 1= single pin
2 = double pin
5. with a reinforced bottom wire
6. the number of posts
7. the colour of the posts:
G=green / W=white /
B=black
8. length of netting

Sheep netting



Complete and user-friendly portable fencing netting for sheep and lambs. Also suitable as fencing near ditches so new-born lambs can stay in the pasture in complete safety. Length: 50m. Includes 14 posts with a single pin that are incorporated into the netting. Several nets are easy to connect together.




075379	Orange, 90/1 - 14/W - 50m	☞ = 1
022175	Orange, 90/2 - 14/G - 50m	☞ = 1
022106	Orange, 90/1 - 14/G - 50m	☞ = 1
075768	Orange, 90/2 W 14/G - 50m	☞ = 1
075386	Orange, 90/2 - 14/W - 50m	☞ = 1

Poultry netting



Do you have chickens that need to be moved regularly? This chicken netting is the ideal solution. It is user-friendly, complete, and has a total length of 50m. The netting includes 15 posts with single pin that have been incorporated into the netting. Several nets are easy to connect together.

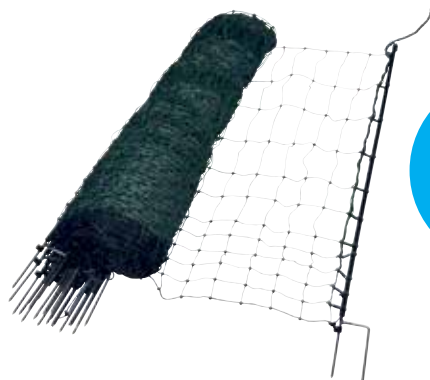

NEW


076833	Green, 112/2 - 15/B - 50m	☞ = 1
077298	Green, 112/1 - 9/B - 25m	☞ = 1



Poultry netting



Do you have chickens that need to be moved regularly? This chicken netting is the ideal solution. It is user-friendly, complete, and has a total length of 50m. The netting includes 15 posts with single pin that have been incorporated into the netting. Several nets are easy to connect together.

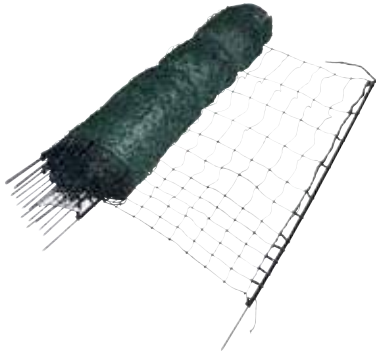


075867	Green, 112/1 - 15/B - 50m	📌 = 1
022229	Orange, 112/1 - 15/G - 50m	📌 = 1
022403	Orange, 112/2 - 15/G - 50m	📌 = 1

Wild boar turbo netting



Turbo netting against wild boars. Strong posts 19mm, best solution to prevent wild boars destroying your crops. An electric fence in combination with a budget physical barrier.

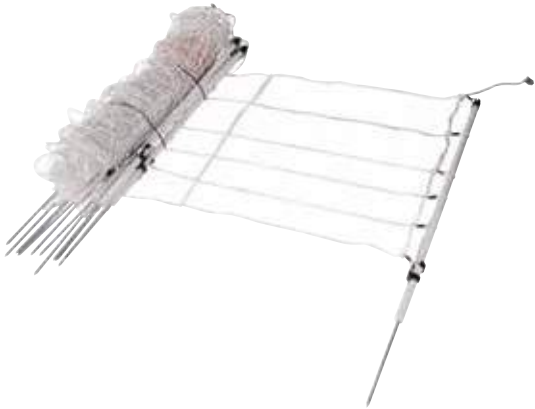

062973	White, 75/1 - 14/W - 50m	📌 = 1
--------	--------------------------	-------

SPECIFICATIONS NETTING

Part.no.	Type of use	Product description	Color netting	Color Post	Pin	Height (cm)	Lenght (m)	Nmbr of posts	Horizontal wires
022106		Sheep netting, Orange 90/1 - 14/G - 50m	Orange	Green	Single	90	50	14	8
022175		Sheep netting, Orange 90/2 - 14/G - 50m	Orange	Green	Double	90	50	14	8
075768		Sheep netting, Orange 90/2 W 14/G - 50m	Orange	Green	Double	90	50	14	8
075379		Sheep netting, Orange 90/1 - 14/W - 50m	Orange	White	Single	90	50	14	8
075386		Sheep netting, Orange 90/2 - 14/W - 50m	Orange	White	Double	90	50	14	8
022168		Goat netting, Orange 105/1 - 14/G - 50m	Orange	Green	Single	105	50	14	9
022212		Goat netting, Orange 105/2 - 14/G - 50m	Orange	Green	Double	105	50	14	9
077281		Rabbit-/hobby Netting, Green 65/1 - 9/B - 25m	Green	Black	Single	65	25	9	10
022182		Rabbit-/hobby Netting, Orange 65/1 - 15/G - 50m	Orange	Green	Single	65	50	15	10
024377		Rabbit-/hobby Netting, Green 65/1 - 15/B - 50m	Green	Black	Single	65	50	15	10
077298		Poultry netting, Green 112/1 - 9/B - 25m	Green	Black	Single	112	25	9	12
022229		Poultry netting, Orange 112/1 - 15/G - 50m	Orange	Green	Single	112	50	15	12
022403		Poultry netting, Orange 112/2 - 15/G - 50m	Orange	Green	Double	112	50	15	12
075867		Poultry netting, Green 112/1 W 15/B - 50m	Green	Black	Single	112	50	15	12
076833		Poultry netting, Green 112/2 W 15/B - 50m	Green	Black	Double	112	50	15	12
062973		Wild boar netting, White 75/1 - 14/W - 50m	White	White	Single	75	50	14	6
010493		Turbo netting, White 90/1 - 14/W - 50m	White	White	Single	90	50	14	8
025473		Turbo netting, White 90/2 - 14/W - 50m	White	White	Double	90	50	14	8
010356		Combo netting, Orange 90/1 - 14/G - 50m	Orange	Green	Single	90	50	14	9
075584		Combo netting, Orange 90/2 - 14/G - 50m	Orange	Green	Double	90	50	14	9
075546		Combo netting, Orange 90/2 W 14/G - 50m	Orange	Green	Double	90	50	14	9
072415		Combo netting, Orange 105/1 W 14/G - 50m	Orange	Green	Single	105	50	14	10
075539		Combo netting, Orange 105/2 W 14/G - 50m	Orange	Green	Double	105	50	14	10



Combo netting



Combo netting: the netting with extra stability for use on rocky territory. Every 30cm the vertical wires are reinforced, resulting in a tighter net in rough terrain.




010356	Orange, 90/1 - 14/G - 50m	☞ = 1
075584	Orange, 90/2 - 14/G - 50m	☞ = 1
075546	Orange, 90/2 W 14/G - 50m	☞ = 1
072415	Orange, 105/1 W 14/G - 50m	☞ = 1
075539	Orange, 105/2 W 14/G - 50m	☞ = 1

Turbo netting



Strong, high quality turbo netting. With a stranded cord, which reinforces the top wire by 80%, for greater conductivity. Because of the low resistance it is ideal to connect more turbo nets together.



010493	White, 90/1 - 14/W - 50m	☞ = 1
025473	White, 90/2 - 14/W - 50m	☞ = 1

Goat netting



Complete and easy to use portable netting for goats and lambs. If the pasture is bordered with ditches, netting offers even the newborn lambs maximum safety. Length: 50m. It is easy to connect nets together.



022168	Orange, 105/1 - 14/G - 50m	☞ = 1
022212	Orange, 105/2 - 14/G - 50m	☞ = 1


Part.no.	Type of use	Conducting wires	Weight (Kg)	Resistans Ohm/50m	Including repairset	Characteristic	Repairset (part.no.)	Post (part.no.)
022106		7	5,9	46	Yes		22104	22101
022175		7	6,65	46	Yes		22104	22105
075768		7	6,3	46	Yes	Reinforced not conducting bottomwire	22104	22105
075379		7	5,9	46	No		22104	22112
075386		7	6,65	46	No		22104	22113
022168		8	6,6	41	Yes		22104	22106
022212		8	7,35	41	Yes		22104	22107
077281		9	6	41	Yes		22104	22111
022182		9	7,76	41	Yes		22104	22110
024377		9	7,76	41	Yes		22104	22111
077298		11	7,42	33	Yes		22104	22108
022229		11	9,45	33	Yes		22104	22108
022403		11	10,26	33	Yes		22104	22109
075867		11	9,45	33	Yes		22104	22108
076833		11	10,1	33	Yes		22104	22108
062973		6	8,415	5	Yes		074747	-
010493		7	6,3	0,6	Yes		074747	22112
025473		7	7,05	0,6	Yes		074747	22113
010356		8	6,2	41	Yes	Vertical polyethylen struts	22104	22101
075584		8	6,2	41	Yes	Vertical polyethylen struts	22104	22105
075546		8	5,9	41	Yes	Reinforced not conducting bottomwire / Vertical polyethylen struts	22104	22105
072415		9	8	42	Yes	Reinforced not conducting bottomwire / Vertical polyethylen struts	22104	22106
075539		9	6,65	42	Yes	Reinforced not conducting bottomwire / Vertical polyethylen struts	22104	22107



Rabbit netting/Hobby netting



Complete and easy to use netting for rabbits or small pets. This netting keeps your small pets in the fenced plot. It also protects your garden, field or pasture. Length: 50m. Includes 15 posts with single or double spike mounted in the net. It is easy to connect nets together.



022182	Orange, 65/1 - 15/G - 50m	🔗 = 1
024377	Green, 65/1 - 15/B - 50m	🔗 = 1

Rabbit netting/Hobby netting



Fencing netting for rabbits and other small pets. Can also be used for an allotment or a field. Complete and easy to attach to several other nets. Length 25m, 9 posts.



077281	Green, 65/1 - 9/B - 25m	🔗 = 1
--------	-------------------------	-------

Repair Set Euro Netting


Repair Set Euro Netting




22104	Repair Set Euro Netting	🔗 = 1
074747	Repair Set Turbo Netting	🔗 = 1

FENCING NETS - MESH WIDTHS


Sheep netting (orange)
Turbo netting (white)

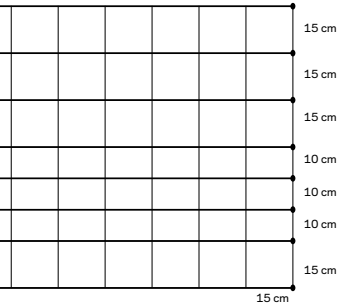


Poultry netting

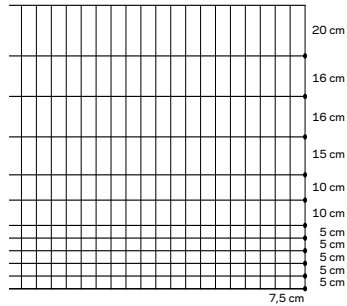


Goat netting

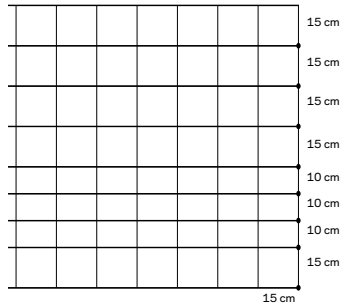


Rabbit netting (orange)
Hobby netting (green)

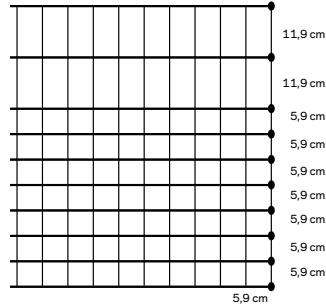


Combo netting - 90cm

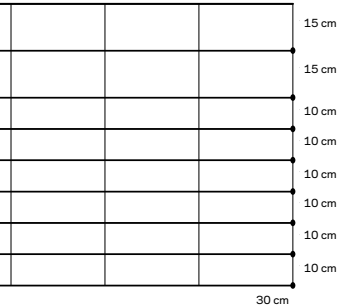

Combo netting - 105cm

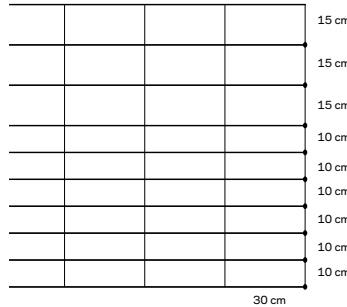

Wild boar netting

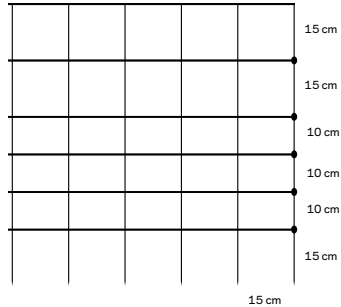



SmartFence 2.0



SmartFence 2.0 is the alternative product for netting. A revolution design where posts, reels and wires are combined into 1 product. Quick and easy to put up.



700007	SmartFence 2.0	☞ = 1
700045	SmartFence 2.0 PK4	☞ = 4
069750	PowerLine wire 3mm, 100m	☞ = 1
069767	TurboLine wire 3mm, 100m	☞ = 1
065264	Battery drill adapter for SmartFence	☞ = 1





KITS

Gallagher offers a wide range of kits - for pets, herons, horses or chickens!! Every kit includes an energizer and they are all easy to install.

Horse Kit B60 12V



The starters kit for horses and ponies has everything you need to set up a small paddock for you horse or divide existing ones. Installing is made easy due to the step by step manual. The kit includes: B60 (12V), PowerLine tape 12.5mm (200m), Vario posts 1m (10 pcs.), Screw-in insulator (25 pcs.), Soft touch gate handle, Warning sign, Earth peg, Gate handle anchor (5 pcs.).

Poultry Kit B60 12V



A complete kit for setting up 50 metres of electric netting 44" (112cm) to keep your poultry in and protect them against predators. Installing is made easy due to a step by step manual. The kit includes: B60 (12V), Poultry netting; double spike, 112cm (50m), Earth peg, Warning sign.



072323 Horse Kit B60 ⚡ = 1



072309 Poultry Kit B60 ⚡ = 1

Garden & Pond Kit M10 230V



A complete fencing kit to keep pets or small animals in or out. Installing is made easy due to the step by step manual. The kit includes: M10 (230V), Hobby post 0.75m (Terra, 10 pcs.), Insulator (25 pcs.), Vidoflex 3 (Green, 100m), Earth peg, Cable set universal and Warning sign.

Garden & Pond Kit B10 9V/12V



A complete fencing kit to keep pets or small animals in or out. Installing is made easy due to the step by step manual. The kit includes: B10 (6x 1,5V), Hobby post 0.75m (Terra, 10 pcs.), Vidoflex 3 (Green, 100m), Insulator (25 pcs.), Earth peg, Warning sign.



072347 Garden & Pond Kit M10 230V ⚡ = 1



072330 Garden & Pond Kit B10 ⚡ = 1



SnailFence Kit M10 (20mtr) 230V



Gallaghers "Out of the Box" solution:
to keep out the neighbour's Cat.
to keep Pine Martens out of the attic,
and of course to keep killer snails away from your vegetable garden.
Content: 1x Gallagher M10 Energizer, 1x 20 meter Snail Fence tape, 1x Junctionbox, 200x Screw M3x12, 10mtr Fence cable, 1x Mountingkit, 1x Manual.



075850	SnailFence Kit M10 (20mtr)	☞ = 1
077427	Snailfence tape extension kit 20m	☞ = 1
077434	Snailfence tape extension kit 50m	☞ = 1
500041000	Fencing tape/Snailtape Junctionbox	☞ = 1

Heron kit



A basic system for a fence around your pond. Through this safe, highly effective fence system your pond is a prohibited area for herons, prevents them from eating fish from your pond. The system includes an energizer with wall clip, 10 border posts, 20 clips, 100 meters of black plastic wire and connecting wire. The material is suitable for a 2-wire fence with a total length of 50 meters.



021727	Heron kit	☞ = 1
021789	100 m wire	☞ = 1

Starter kit M10 230V



Kit includes M10 (220V), earthing plate, warning sign, connecting cable and wire clip. To keep in pets (e.g. dog) or deter small predators and other animals (e.g. stone martens, the neighbour's cat, herons, etc.). For gardens smaller than 20 x 60m.



065189	Starter kit M10 230V	☞ = 1
--------	----------------------	-------

ELECTRIC FENCING ON A WOODEN FENCE — HOW DOES THAT WORK?

An animal is given shock when it connects the + and - wires. The bottom wire (-) operates as the earthing. When a cat touches the fence with its paws, it will make contact with the earth wire (-). It then closes the circuit by touching the + wire with its head. This produces a shock effect, which makes the cat jump back into the garden.

4.000V
IMPULSE TENSION



ELECTRIC FENCING FOR DOMESTIC ANIMALS IS HARMLESS!

An electric fence is based on the principle of a very short pulse being transferred over a wire. This pulse creates a current flow that is conducted over the skin instead of over the body. This ensures that only a shock reaction is created and no harm is done to the animal.





H-Trap (195x120cm)



Control horseflies without chemicals. Neither animals, such as horses or cattle, nor people enjoy horseflies. The H-trap reduces the horsefly population to an absolute minimum. Tests have demonstrated that a 90–95% reduction in horseflies can be achieved around an H-trap without using pesticides or electricity.

HorseFly Magnet



The horsefly magnet is the entry model for dealing with wasps and horseflies. The horsefly trap is suitable for a plot with 5 horses or a paddock of maximum 10,000m2.



034014 Horse fly trap ⚡ = 1



000861 HorseFly Magnet ⚡ = 1

MT-Trap (40x50cm)



You need a horsefly trap to stop horseflies and wasps and this horsefly trap ensures that 95% of horseflies is captured. The MultiTrap, a portable horsefly trap, also known as the MT-trap, has been designed to eradicate horseflies and wasps.

Foxlights



The way to protect your venerable animals against attacks from foxes and other night predators. 9 LED bulbs blink randomly so that the illusion is created for predators that someone is patrolling the area. 6 Volt battery is not included.



000441 Horse fly and Wasps trap ⚡ = 1



061716 Foxlights ⚡ = 1

002169 6V Battery for Foxlight ⚡ = 1



HOW DO I INSTALL MY FENCING?

For properly operating permanent fencing you are looking for durable materials that you can use for many years. It is equally important to make sure this permanent fencing is erected properly. We are pleased to explain the basic principles of how to build permanent fencing. For more comprehensive information, please visit www.gallagher.eu

1. Prepare a plan
2. Determine the correct wire height
3. Put up the corner posts
4. Put up the intermediate posts
5. Tension the fencing
6. Fit the energizer and earthing


PREPARE FOR THE GRAZING SEASON, DO THE GALLAGHER CHECK!

1. Check your electric fence energizer
2. Check the voltage on your fence
3. Check your fencing
4. Check your earthing

It goes without saying that all these steps are explained in detail in the Gallagher Check video. This is available at www.gallagher.eu or our YouTube channel.



**Go to www.gallagher.eu
for even more installation advice**

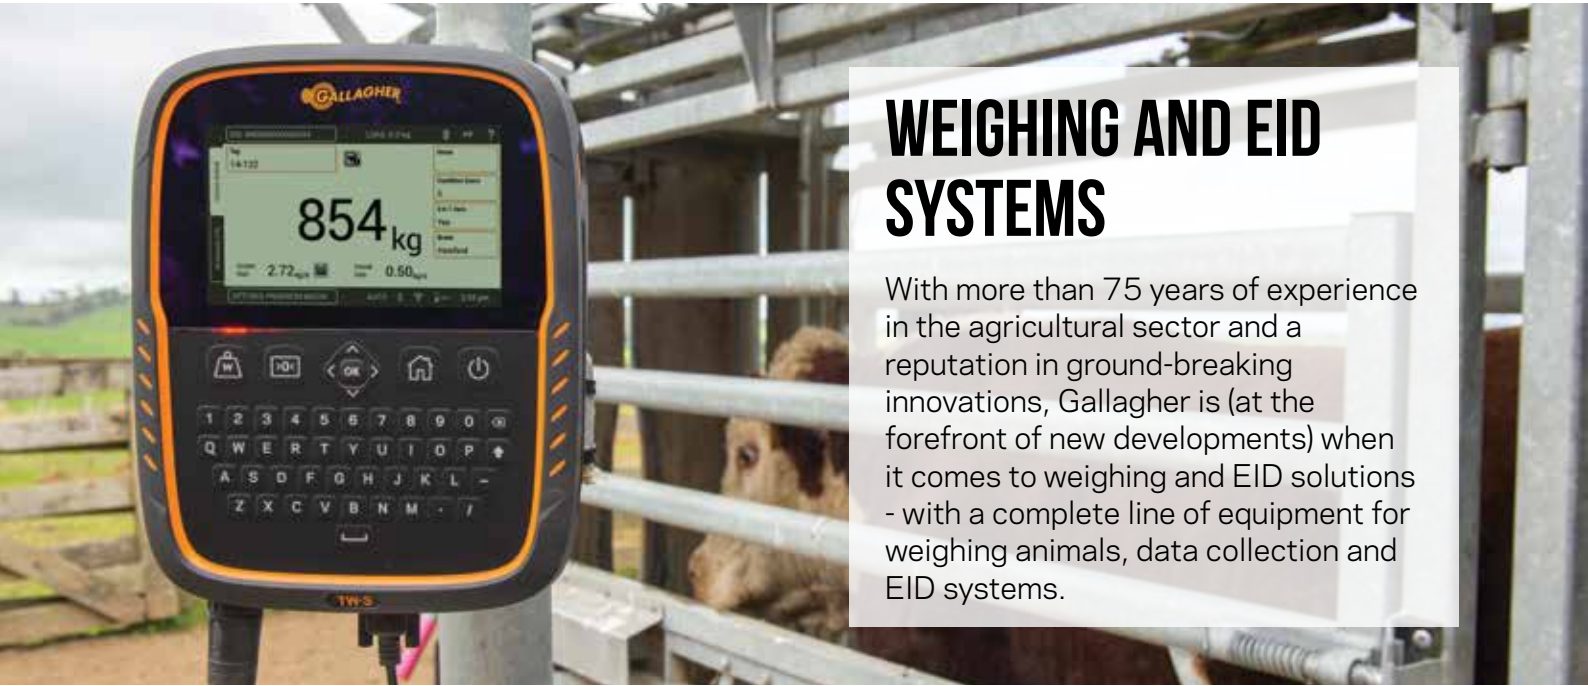

WEIGHING AND EID SYSTEMS

With more than 75 years of experience in the agricultural sector and a reputation in ground-breaking innovations, Gallagher is (at the forefront of new developments) when it comes to weighing and EID solutions - with a complete line of equipment for weighing animals, data collection and EID systems.

TW-3 and TW-1, the new Gallagher Touch Weigh Scale range makes weighing and data management easier than ever before. Manage your animal weights and weight gain all on an easy to use, fully intuitive touch screen.

Weight gain at the touch of a finger.

TW-3



Simple to operate weigh scale and data collector



Record and analyse animal data to optimise performance

TW-1



Simple to operate, touch screen weigh scale



Collect data to optimise animal performance

026015	TW-1 Weigh Scale	☞ = 1
026039	TW-3 Weigh Scale and Data Collector	☞ = 1

Gallagher scales provide a modern, performance-aware cattle farmer with an innovative weighing system that are durable, reliable, accurate and extremely easy to use.

Digital weighing system, with serial port and Bluetooth compatible.

Quick weigh kit 600

Weigh scale W210

Can be used in combination with an aluminium platform.



Loadbars: 2000 kg 600 mm

Weigh scale W310

Large and easy to read display.

Simple operation with large push buttons.



Internal, chargeable battery with an extremely long lifespan.

Quick, automatic, accurate weight records.

013053	Weigh scale W310	☞ = 1
054053	Quickweigh kit 600/W210	☞ = 1

Weigh scale W110



Gallagher's new entry model for weighing systems.

Digital weighing system, entry level model. For use with loadbars of 1,500 kg (580 mm), 2,000 kg (1,000 mm) and load cell. The scales can be used in three ways:

1. Static weights or products.
2. Manually weighing animals, taking account of any movements by the animal.
3. Automatically weighing animals (the weight is determined as soon as it is stable).

010205 Weigh scale W110

☞ = 1

Combination pack: HR5, W310v2 and dongle

The ultimate combination of Gallagher products for users who want to weigh animals individually and collect and analyse individual data with the EID system. Bluetooth connection could not be easier.



072712 Combo package
HR5+W310v2+dongle

☞ = 1

An EID tag reader is an essential component of your EID system. The scanner reads the unique tag number of the individual animals and stores it during weighing, treatment or identification in the field or the shed.

Gallagher portable EID hand scanners are light-weight, durable and easy to use - perfect to take to different sites. Animal details can be scanned, recorded and collected in any part of the farm.

SmartReader HR5



033037 SmartReader HR5

☞ = 1

For all our weighing and identification products and more information, please visit www.gallagher.eu





COMPLETE RANGE

B	
B10	22
B100	21
B11 incl. 6x1.5V batteries	22
B180 + Solarbox	14
B180 Multi Power	14
B20	22
B200	20
B200 + 6W solar assist	20
B280 + Solarbox	13
B280 Multi Power	13
B300	20
B35	8, 21
B40	21
B40 + 4W solar assist	21
B50	21
B60	21
B80 Multi Power	14
Battery 9 volt	30
Battery back-up	17
Battery charger CTEK (12V)	31
Battery energizer box	35
Battery SLA 12 volt	31
Bentonite super earthing mix	33
Blue Polywire	48
Bracket for 10W/20W/30W GE Panel	26

C	
Claw Insulator	53
Clip	54, 57
Clip lock strainer	59
Clips stainless steel	57
Combo netting	69
Compression gate handle Black	63
Connectors	58
Cord connector with wingnut	58
Crocodile clip	36
Cut out switch	34

D	
Deer post plastic	42
Drill chuck Basic	66
Drill chuck for insulators Universal	66
Drive thru Electro gate	60

E	
Earth stake	33
Earthing accessories	33
Eco post	37
Econoreel 500m	64
Elastic rope gate	61
Electrified steel gate	60
End strain kit	59
Energizer controller for i Series	17
Equifence	44
EU Warning sign (universal)	36

F	
Farmer pliers	66
Fault Finder	36
Fence monitor for i Series	17
Fence Volt Meter	36
Fibre glass post	42
Fibreglass Driver Caps	43
Flashlight	17
Flood gate controller	34
Foxlights	74

G	
Gallagher Insulated Line Post	7, 38

Gallagher pliers	65
Gallagher Solarbox	35
Garden & Pond Kit B10 9V/12V	72
Garden & Pond Kit M10 230V	72
Garden post / Pond Post	43
Gate handle anchor	63
Gate Release Timer	60
Geared reel 500m	64
Goat netting	69

H	
H-Trap	74
H.T. zinc-alu wire	45
Heron kit	73
High conductive fence wire 2,65mm	45
Horse Kit B60 12V	72
Horse post	41
HorseFly Magnet	74

I	
i Series Alarm System	17
Insulator for metal orange post	57
Insultimber (FSC®)	37

J	
Joint clamp	58
Joint clamp angle	58

K	
Kit 4W (B40/B50)	25
Knife Cut-Off Switch	34

L	
Large geared reel 1200m	65
Lead out cable	33
Lead out cable ø2,5mm XL	33
Lead set	35
Lightning diverter	34
Line Post Lifter Adapter	39, 66
Line Post Pilot	39, 66
Live fence indicator	36

M	
M.T. fencing wire	45
M120	19
M1400	6, 18
M160	19
M1800i	16
M200	19
M2800i excl. accessories	16
M2800i incl. accessories	16
M300	19
M50	19
M500	19
M550	6, 18
M950	6, 18
MB1000 (230V AC / 12V DC - 10 J)	13
MB1800i (230V AC / 12V DC - 14 J)	13
MB2800i (230V AC / 12V DC - 21 J)	12
Mount Solar post S10, S16, S20	25
Mounting bracket	57
MT-Trap	74
Multi reel connector	65
Multi strand gate kit	60

N	
Neontester	36

O	
Offset bolt-on insulator 20cm / M6	56

Offset insulator	57
Offset insulator 10cm (20)	56
Offset Pinlock Insulator 30cm Black	57
Offset screw-in insulator 20cm	56
Optima Yellowtop	32
Orange gate handle	62

P	
Permanent solar/12V	17
Pigtail offset	56
Pigtail post	41
Porcelain insulator	54
Post holer	66
Poultry Kit B60 12V	72
Poultry netting	67, 68
Power Supply 230V/12V	14
PowerLine rope	47
PowerLine rope Eco	47
PowerLine tape 12,5mm	50
PowerLine tape 20mm	50
PowerLine tape 40mm	50
PowerLine tape insulator	54
PowerSupply 230V/15V	13
PVC plastic post	42

Q	
Quattro post	43

R	
Rabbit netting/Hobby netting	70
Rammer	66
Rammer Line Post	39, 66
Reel 200m	64
Reel 400m	64
Reel/termination post	65
Remote controller for i Series	17
Repair Set Euro Netting	70
Retractable auto reel	62
Ring Top post	40
Roller bolt-on insulator	54
Roller insulator	54
Roller screw-in insulator	54
Rope tensioner	59
Round battery	31

S	
S10 incl. battery	25
S100 incl. battery	24
S16 incl. battery	24
S180	25
S20 incl. battery and mount solar post	24
S200 incl. 2 batteries (12V - 2,0 J)	9, 23
S220 (B200+20W+Optima 2,7I)	25
S230 (B200+30W+Optima 3,7I)	25
S280	25
S40 incl. battery	24
S400 incl. 2 batteries (12V - 4,0 J)	9, 23
Screw-in insulator	53
Screw-in Insulator PROMOPACK (100)	52
Screw-on rod Black ø4-10mm	42
Screw-on rod insulator (20)	57
Screw-on tape insulator	42
Screws	66
Security kit	34
Sheep netting	67
Sheep post / Hobby post	41
Siren	17
Sleeve for Line Post rammer	39
SmartFence 2.0	71
SMS controller i Series	17



WEIGHING AND EID SYSTEMS

SMS fence alarm	36
SMS remote control (GSM)	17
SnailFence Kit M10 (20mtr) 230V	73
Soft touch gate handle Rope/Wire	62
Soft touch gate handle Tape	62
Solar Assist Kit 6W	20, 21, 25
Solar bracket 10/20/30W Panel	26
Solar bracket 50/60W Panel	26
Spring gate	62
Spring steel post	42
Stander B20/B35	21, 22
Starter kit M10 230V	73
Steel pigtail post	42
Steel post Live Tip Lockset Offset (16cm, pack of 20)	56
Strain insulator	53
Strain insulator reinforced	54
Stranded wire	46

T	
Tape connectors	59
Tape energizer connector	59
Tape joiner	58, 59
Tension spring	59
Top insulator for 019250	42
Triple Geared Reel Stand pre-installed	65
Tumble wheel (5)	43
Turbo netting	69
TurboLine corner/strain insulator	55
TurboLine horse corner/strain insulator	55
TurboLine horse insulator	55
TurboLine rope	48
TurboLine tape 12,5mm	50
TurboLine tape 20 mm	50
TurboLine tape 40mm	50
TurboLine Tape clip for Line Post (40mm)	7, 38, 55
TurboLine tape insulator	55
TurboStar + TurboLine Horse insulator	51
TurboStar tape 40mm	50, 51

U	
Universal Post Lifter	39, 66

V	
Vandal proof box	35
Vario post	41
Vidoflex 3	49
Vidoflex 6	49
Vidoflex 9	49
Vidoflex connector (4)	58

W	
Wild boar turbo netting	68
Wire clip for Line Post	7, 38, 53
Wire dispenser	65
Wire Insulator	56
Wire tensioner	59, 66
Wire twister	65
Wood post Live tip Offset 16cm	56
Wooden post "W" insulator	53
Wooden post "W" super insulator	53

X	
XDI bolt-on insulator	52
XDI offset bolt-on insulator 20cm / M6	55
XDI offset insulator 18cm	56
XDI offset screw-in insulator 10cm	55
XDI offset screw-in insulator 18cm	56
XDI screw-in insulator	52

C	
Combination pack: HR5, W310v2 and dongle	77

Q	
Quick weigh kit 600	76

S	
SmartReader HR5	77

T	
TW-1	76
TW-3	76

W	
Weigh scale W110	77
Weigh scale W310	76

WE KEEP YOU INFORMED ONLINE!



ORDER NOW ONLINE

It is easy to order your products from our website. You can find our entire range on the website. If you are not sure which components you need for your fencing we will be pleased to give you customised advice!

www.gallagher.eu

SUBSCRIBE TO OUR YOUTUBE CHANNEL

Discover how you can check your Gallagher fence or install an energizer. It also has all the information about our latest products. All in easy and short videos. Subscribe quickly and stay up to date!

www.youtube.com/GallagherEuropeBV

Your Gallagher dealer:

Important information! For all promo's available while stock lasts.

Colour and appearances may slightly differ to those of the actual items.



8 713235 061631